Multiblitz®
+ PROFESSIONAL LIGHTING

Quality & Reliability
OVER 60 YEARS
Designed & Manufactured
in Cologne / Germany

02 . MULTIBLITZ

MAIN CATALOGUE
CONTENT

WELCOME TO THE
MULTIBLITZ EXPERIENCE

founded by Dr. Ing. Dieter A. Mannesmann

In accordance with the Mannesmann family tradition, Dieter Mannesmann was an inventor and explorer with an exceptional entrepreneural spirit. His ideas and discoveries were groundbreaking for strobe photography and his ambition to find new innovations was never satisfied.

We are proud of this heritage and strive to continue his legacy by offering the most sophisticated and reliable lighting equipment available today to professional photographers around the globe.

As one of the most experienced lighting manufacturer in the world, we take pride in the fact that we are the only European brand that is still manufacturing premium flash systems in its home country and not Far East, unlike most other European brands.

The scope of the Multiblitz business model includes product design, development, assembly, quality assurance, marketing, distribution, and sales – all carried out by outstanding and dedicated personnel in our facility in Cologne, Germany.
With virtually every step of the process executed in one facility, we can guarantee more flexibility and faster turnaround times than our competitors. Over 60 years of experience in combination with the finest components and state-of-the-art assembly methods, guarantee sophisticated, reliable and feature filled flash systems with and outstanding level of quality.

In this catalog, we present the Multiblitz product line-up for 2011/2012. We are sure that the quality and versatility of our products will spark your enthusiasm.

MULTIBLITZ - EXCELLENCE IN PROFESSIONAL LIGHTING, MADE IN GERMANY

Quality & Reliability
OVER 60 YEARS
Designed & Manufactured in Cologne / Germany

TIPA AWARD WINNER 2010
PROFILUX plus *by Multiblitz*
- BEST FLASH SYSTEM -

STATE OF THE ART
PHILOSOPHY

PERFORMANCE

Easy to use, powerful, and efficient. Multiblitz heads produce exceptionally even "edge to edge" illumination. Multiblitz kits feature a full range of dedicated accessories for any lighting application. Multiblitz units are also the most efficient! Even the smallest model, the COMPACT PLUS MK2 with a weight of only 0,97 kg and 200 Ws flash power supplies perfect light with the standard reflector FILNOS/50°. Guide Number (ISO100): 47,1, F-Stop (1M/ISO 100): 32,2.

SUPERIOR DESIGN

The smallest and lightest units in their class! Multiblitz's innovative design saves almost half the weight and size of other units. Compact to fit in nearly any lighting situation and operating temperature even after hours of use in the studio.

EASE OF USE

All controls are neatly arranged and simple to operate, insuring fast and accurate results. Long-life halogen modeling lamps and color corrected flash tubes are easily exchangeable by the user. Even spare fuses are included. All AC and sync cords are bright red and extra long.

QUALITY & DEPENDABILITY

Every company talks about quality but Multiblitz uses the highest grade components, from capacitors to switches, even on items hidden from view.
All units are extremely robust and meet the European CE standards for electronic equipment. Multiblitz manufactures premium grade equipment only, designed to function "Day In, Day Out". Every unit is checked by hand and factory "test fired" to insure flawless reliability.

QUICK OPERATION

Single control for flash intensity and proportionate modeling lamp. Flash output can be adjusted exactly via the digitally controlled Fast Dial output control. No manual dumping of the capacitors is needed. In addition, all Multiblitz units have built in IR slaves for wireless compatibility. Saving time during set ups, while eliminating a confusing maze of wires. Most units are equipped with radio receivers for remote control and flash triggering.

WORLDWIDE SUPPORT

Multiblitz 3 year warranty assures you of fast, dependable service. In the unlikely event of required repair, Multiblitz licensed service centers worldwide provide you with professional assistance, just a phone call away.

COST
Quality does not cost extra in the long run.

BAYONET

COMPACT
plus MKII

200 Ws

PROVEN PRECISION WITH NEW FEATURES

Now, digitally controlled and with exciting new features, the COMPACT PLUS is mainly designed for the ambitious amateur who strives to work like a professional. Equipped with an intuitive control panel and features one would expect from larger flashes, the COMPACT PLUS offers every thing and a bit more for its intended areas of application like portraiture, product and document photography. High-quality electronic and mechanical components guarantee an outstanding long life cycle and permanently constant output.

You will be surprised how much LIGHT you will get out of a COMPACT PLUS unit when you compare it to "200 Ws" units made by our competitors. It's featured time proven P-bayonet mount provides almost indefinite possibilities of composition due to the wide range of available Multiblitz light shapers.

IMAGE BY: MANUEL THOMÉ // WWW.MANUELTHOME.DE

COMPACT
plus MKII

200 Ws   Compatible remotes:

**COMPACTPLUS
200 WS**

**X-SLAVE
FLASH TRIGGER**

COMPACT PLUS
FACTS

X SLAVE COMPATIBLE

+

+ INFINITE "FAST DIAL" OUTPUT CONTROL VIA 5 F-STOPS (12.5-200 WS)
+ DIGITAL DISPLAY
+ 60 W MODELING LIGHT
+ PHOTO CELL/IR RECEIVER SWITCHABLE
+ FLASH DURATION FROM 1/1015 SEC RECYCLING TIME FROM 0.6 SEC
+ ACOUSTIC AND OPTICAL "READY" INDICATION

+ OPEN FLASH BUTTON (TEST)
+ WEIGHT: 0.97 KG
+ P-BAYONET MOUNT
+ NOISELESS! COOLING VIA VENTILATION SLOTS
+ 4 CHANNEL RADIO TRIGGER KIT INCLUDED WITH EVERY UNIT AND FLASH KIT

TECHNICAL DATA		200
FLASH POWER	J(WS)	200
POWER SUPPLY	V	220 - 240
GUIDE NUMBER, ISO 100	REFLECTOR FILNOS/50°	47.1
F-STOP, 1 M, ISO 100	REFLECTOR FILNOS/50°	32.2
CONTROL RANGE	J(WS)	12.5 – 200
RECYCLING TIME	SEC	P1/16 = 0.6 / P 1/1 = 2
FLASH DURATION T 0.5	SEC	P1/16=1/534 / P1/1=1/1015
HALOGEN MODELLING LIGHT	W	60/E14
SYNC SOCKET, VOLTAGE	V	< 5
FLASH VOLTAGE STABILITY		+/- 0.5 %
FLASH TUBE, UV ABSORBING, CODE		ECOROW / ECOROR
FLASH TRIGGERING		PHOTOCELL, SYNC CABLE, OPEN FLASH BUTTON (TEST), INFRA-RED, RADIO (WITH X SLAVE RADIO TRIGGER)
CONNECTED LOAD		230 V / 2 A / 0.46 kVA
ELECTRIC SAFETY		DIN IEC 491, VDE 0882
DIMENSIONS	MM	261 X 110 X 162
WEIGHT	KG	0.97

Tolerances of the technical data for measured values and components according to the standard DIN IEC // Subject to technical changes
Reflector not included with single unit!

BAYONET

PROFILUX
eco

250 | 500 Ws

THE REINVENTION OF A CLASSIC: TIME PROVEN CHARACTERISTICS PAIRED WITH STATE-OF-THE-ART TECHNOLOGY, EXCITING NEW FEATURES AND A DISTINCTIVE DESIGN.

If you are used to work with a premium quality flash like the famed PROFILUX CLASSIC, then the new PROFILUX ECO compact flashes are the right choice for your passion. Based on the technology of the award winning PROFILUX PLUS system, the PROFILUX ECO flashes offer all the features, which are indispensable for modern studio photography. Fast recycling times, short flash durations, and exact repeatability guarantee a smooth workflow during any shooting.

IMAGE BY: FIRAT BAGDU // WWW.FIRATBAGDU.DE

PROFILUX
eco 250 | 500 Ws

Compatible remotes:

PROFILUX ECO 500 WS

RS² FLASH TRIGGER

PROFILUX ECO 250 WS

PROFILUX ECO
FACTS

RS² COMPATIBLE

- 250 WS I 500 WS FLASH OUPUT
- 5 F-STOP POWER RANGE ADJUSTABLE IN 1/10 INCREMENTS
- MODELING LAMP WITH A SERVICE LIFE OF 2000 HRS
- SWITCHABLE SLAVE-CELL
- BUILT-IN 16 CHANNEL WIRELESS RECEIVER WITH 30M RANGE, COMPATIBLE WITH THE MULTIBLITZ RS² RADIO TRIGGER.

- DIGITAL DISPLAY AND FAST DIAL DIGITAL OUTPUT CONTROL
- AUTOMATIC DISSIPATION OF ENERGY WITHOUT FIRING
- OPTICAL AND/OR ACOUSTIC FIRING MONITOR
- AUTOMATED FAN COOLING

TECHNICAL DATA		250	500
FLASH POWER	J(WS)	250	500
POWER SUPPLY	V	220 - 240	220 - 240
GUIDE NUMBER, ISO 100	REFLECTOR FILNOS/50°	48.8	73.5
F-STOP, 1 M, ISO 100	REFLECTOR FILNOS/50°	45.3	64.4
CONTROL RANGE (ADJUSTABLE IN 1/10 POWER INCREMENTS)	F-STOPS / J(WS)	5 / 31,25 - 500	5 / 31,25 - 500
RECYCLING TIME	SEC	P 1/16 = 0.1, P 1/1 = 0.9	P 1/16 = 0.5, P 1/1 = 1.7
FLASH DURATION T 0.5	SEC	P 1/16=1/519, P 1/1=1/995	P 1/16=1/301, P 1/1=1/757
HALOGEN MODELLING LIGHT, W / SOCKET / CODE	W	150 / B 15D / LUHAL 2	205 / B 15D / LUHAL 3
COLOUR TEMPERATURE (AT MAX. OUTPUT)	K	5500 +/- 150°	
SYNC SOCKET	V	< 5	
FLASH VOLTAGE STABILITY		+/- 0.5 %	
FLASH TUBE, UV ABSORBING, CODE		COMROW 4 / COMROR 4	
FLASH TRIGGERING		PHOTO CELL, SYNC CABLE, OPEN FLASH BUTTON (TEST), INFRA-RED, RADIO (WITH RS 2 RADIO TRIGGER)	
CONNECTED LOAD		230 V / 4 A / 0.92 KVA	
ELECTRIC SAFETY		DIN IEC 491, VDE 0882	
DIMENSIONS	MM	326 X 124 X 190	
WEIGHT	KG	1.6	1.8

Tolerances of the technical data for measured values and components according to the standard DIN IEC // Subject to technical changes
Reflector not included with single unit!

BAYONET

PROFILUX
plus

200 | 400 | 800 Ws

THE LIGHT REVOLUTION CONTINUES…

The "Best Flash System 2010" just got a boost. As of now, the new PROFILUX PLUS 800 replaces the PROFILUX PLUS 600 and it comes with exciting new features: 200 J(Ws) more flash power and 8 instead of 7 f-stops. Correspondingly, we extended the control range of the PROFILUX PLUS 200 and 400 units from 6 to 7 f-stops. When a PROFILUX PLUS unit is mains operated, the integrated "True Multi-Voltage Technology" provides protection from voltage spikes and ensures a constant performance from flash to flash, even with mains caused voltage fluctuations. When battery powered with a PROPAC 1 or PROPAC 2 battery pack, a PROFILUX PLUS unit delivers up to 3200 flashes out of one fully charged battery. With the new TRIGGER HAPPY radio remote you can independently address up to 16 channels/16 IDs and control all functions of the PROFILUX PLUS remotely. The smart and innovative "Easy Clip" feature of the TRIGGER HAPPY remote helps you create clipping paths within your favorite photo editing software with a minimum of effort.

PROFILUX PLUS
FACTS

RS² COMPATIBLE   TRIGGER HAPPY COMPATIBLE   +

+ DESIGNED FOR MAINS- AND BATTERY OPERATION

+ TRUE MULTI VOLTAGE TECHNOLOGY: 100 - 260 V

+ INFINITE FAST DIAL OUTPUT CONTROL

+ 8 F-STOPS / PROFILUX PLUS 800

+ 7 F-STOPS / PROFILUX PLUS 200 & 400

+ ADJUSTABLE DOWN TO 5 WS FLASH POWER AND 1,6 W MODELING LIGHT

+ HALOGEN TUBE WITH 2000 HRS SERVICE LIFE

+ FLASH DURATION FROM 1/3000 SEC., RECYCLE TIME FROM 0.1 SEC.

+ PHOTO CELL/IR-RECEIVER SWITCHABLE

+ BUILT-IN 16 CHANNEL WIRELESS RECEIVER, COMPATIBLE WITH RS² TRIGGER AND TRIGGER HAPPY REMOTE

+ BUILT-IN PRE-FLASH ELIMINATOR "RED EYE /TTL/E-TTL"

+ STABILIZED COLOUR TEMPERATURE (PROFILUX PLUS 800)

IMAGE BY: ALEXANDER HEINRICHS // WWW.AH-PHOTO.DE

PROFILUX
plus
200 | 400 | 800 Ws

Compatible battery packs and remotes:

PROFILUX PLUS 800 WS

PROPAC 1 & PROPAC 2

PROFILUX PLUS 400 WS

RS² FLASH TRIGGER

PROFILUX PLUS 200 WS

TRIGGER HAPPY REMOTE CONTROL

TECHNICAL DATA		200	400	800
FLASH POWER	J(WS)	200	400	800
POWER SUPPLY (AUTOMATIC MULTI-VOLTAGE)	V	100 - 260	100 - 260	100 - 260
GUIDE NUMBER, ISO 100	REFLECTOR FILNOS	45	79	118.7
F-STOP, 1M, ISO 100	REFLECTOR FILNOS	45	64.6	90.7
POWER RANGE	F-STOPS / J (WS)	7 / 3 - 200	7 / 6 - 400	8 / 6 - 800
POWER INCREMENTS	F-STOPS	1/10	1/10	1/10
RECYCLING TIME: (AT MAX. OUTPUT, 230 V)	SEC	0.6	1.5	2.6
RECYCLING TIME: (AT MAX. OUTPUT, 110 V)	SEC	0.9	1.8	4.0
FLASH DURATION T 0,5	SEC	1/3000-1/1200	1/1700-1/900	1/1600-1/800
COLOUR TEMPERATURE: (AT MAX OUTPUT)	K	5500 +/- 150	5500 +/- 150	5500 +/- 150
BATTERY OPERATION PROPAC 1 / PROPAC 2		YES	YES	YES
BUILT-IN 16 CHANNEL RADIO TRIGGER		YES	YES	YES
ACOUSTICAL/OPTICAL "READY" INDICATION		YES	YES	YES
IR/PHOTO CELL ON-OF		YES	YES	YES
"TEST" BUTTON		YES	YES	YES
BUILT-IN PRE-FLASH ELIMINATOR ("RED EYE"/TTL, E-TTL)		YES	YES	YES
FAN COOLED		YES	YES	YES
AUTO-DUMPING		YES	YES	YES
COLOUR TEMPERATURE STABILIZED		-	-	YES
FLASH TUBE, UV– ABSORBING	CODE	PLUSROW	PLUSROW	PLUSREW
MODELING LIGHT (220-240 V MAINS OPERATION)*	W	75	150	205
TYPE*	CODE / SOCKET	PROHAL / B 15D	LUHAL 2/ B 15D	LUHAL 3 / B 15D
MODELING LIGHT CONTROL RANGE	W	1.2 - 75	2.3 - 150	1.6 - 205
MODELING LIGHT (100-130 V MAINS OPERATION, BATTERY OPERATION)	W	150	150	150
TYPE*	CODE / SOCKET	PACHAL / B 15D	PACHAL / B 15D	PACHAL / B 15D
MODELING LIGHT CONTROL RANGE	W	2.4 - 150	2.4 - 150	1.2 - 150
SYNCHRONISATION		SYNC LEAD, RADIO, SLAVE CELL, IR, HOT-SHOE & CAMERA FLASH, TRIGGER HAPPY		
SYNC VOLTAGE	V	< 5	< 5	< 5
CONNECTED LOAD	KVA	0.92	0.92	0.92
FLASH VOLTAGE STABILITY	%	+/- 0.5	+/- 0.5	+/- 0.5
RADIO INTERFERENCE SUPPRESSION		ACCORDING TO CE, DIN IEC 491, VDE 0882		
DIMENSIONS (W X L X H)	MM	120 X 282 X 149	120 X 282 X 149	120 X 325 X 150
WEIGHT	KG	1.9	2.2	2.7

*220-240 V halogen tubes (75 W, 150 W, 205 W) can be used in all Profilux Plus units.

Tolerances of the technical data for measured values and components according to the standard DIN IEC // Subject to technical changes
Reflector not included with single unit!

New!
AVAILABLE FROM JULY 2012

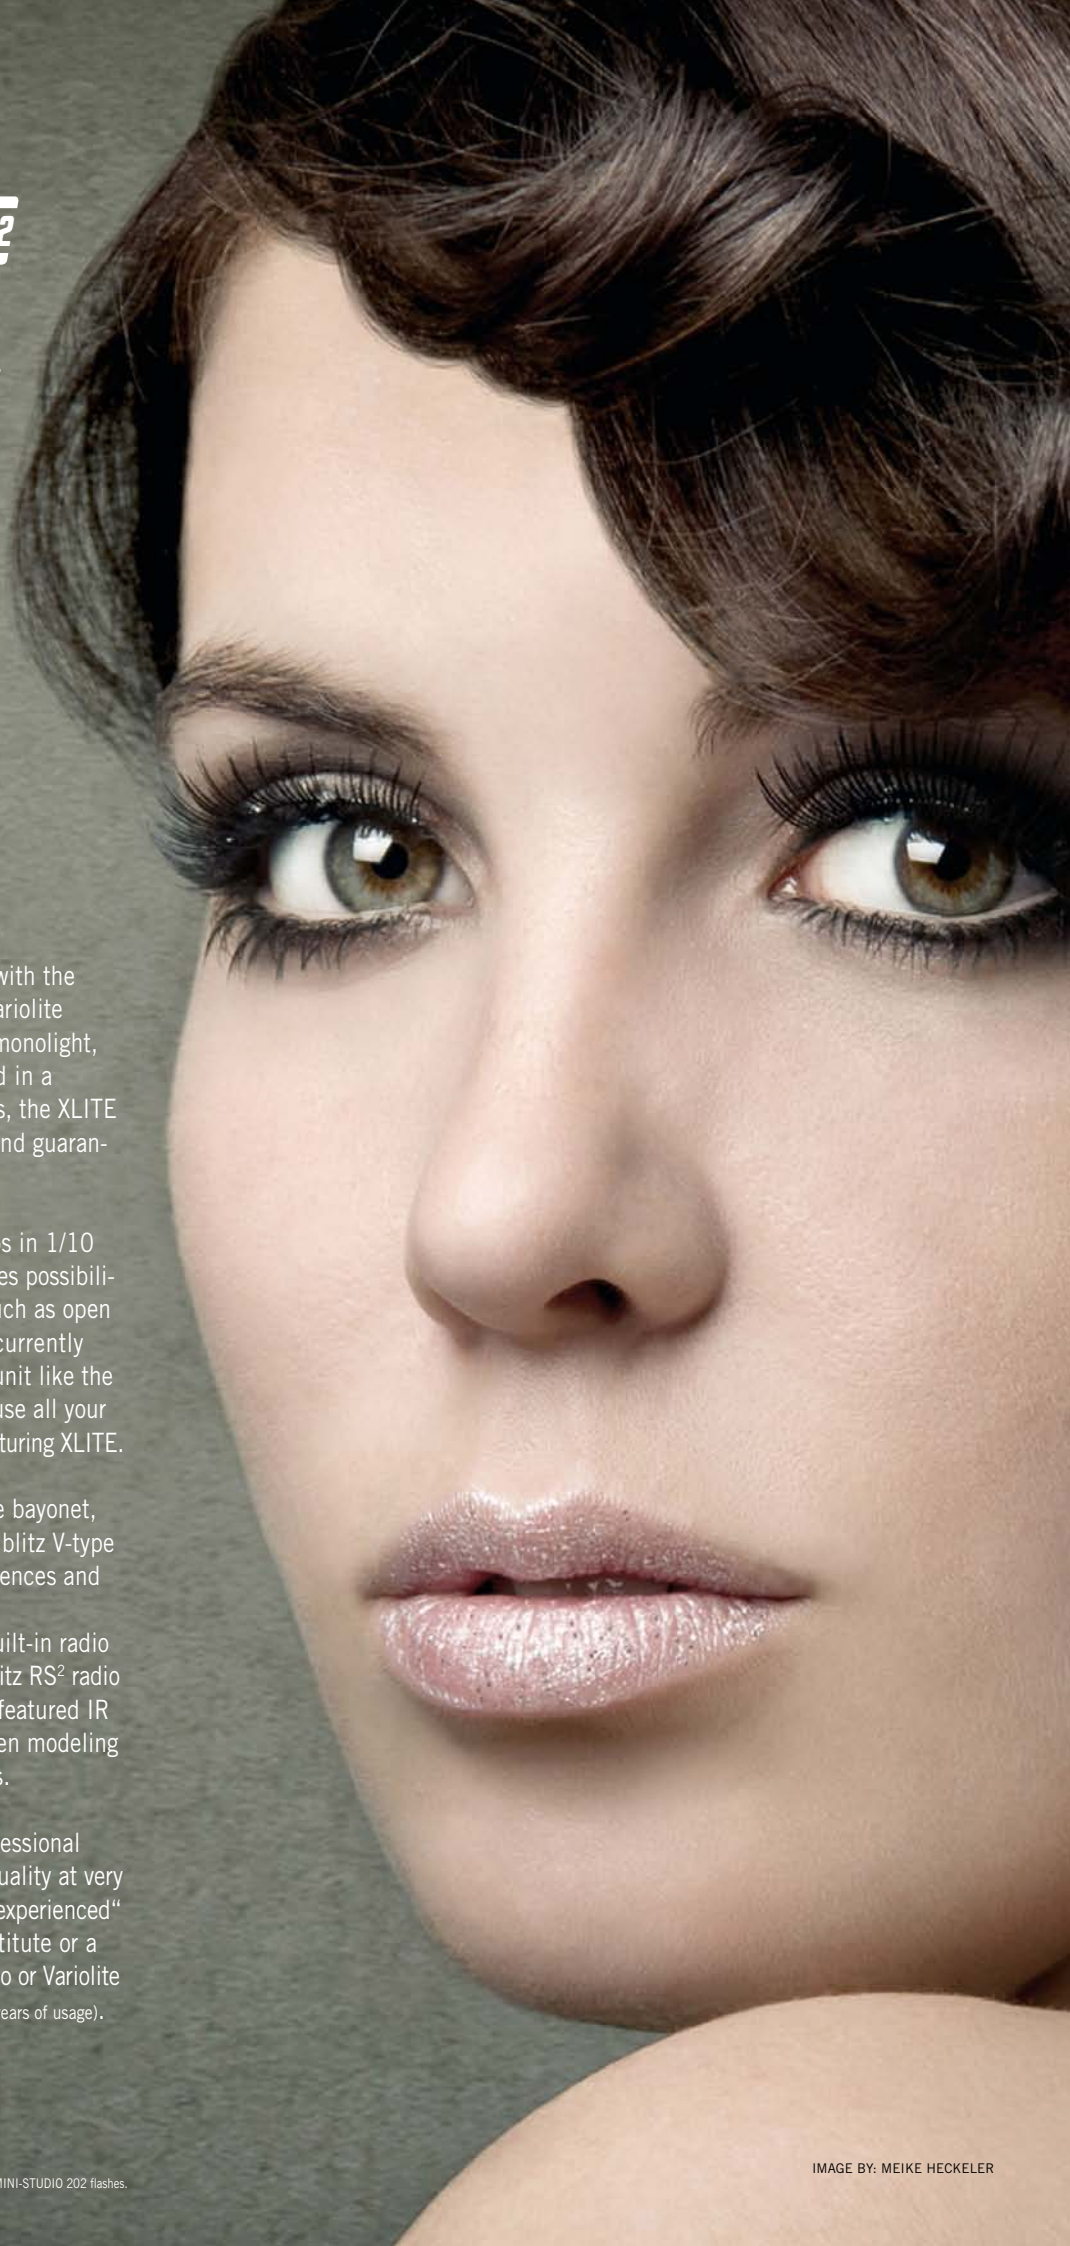# XLITE

CLASH OF GENERATIONS

The new XLITE merges modern technology with the principles of the legendary Mini Studio & Variolite systems. The XLITE is an extreme versatile monolight, developed for the demanding daily workload in a modern photo studio. Like all Multiblitz units, the XLITE features a rugged and robust construction, and guarantees peak precision and powerful output.

Flash output can be controlled over 5 f-stops in 1/10 increments from 30 to 500 Ws, which enables possibilities to follow modern photographic trends such as open aperture photography. In the case you are currently working with an older generation Multiblitz unit like the Mini Studio or Variolite, you will be able to use all your current light shapers on the V-type bayonet featuring XLITE.

The XLITE is equipped with the larger V-type bayonet, enabling the use of the vast amount of Multiblitz V-type light modifiers for all types of lighting preferences and styles of the photographer.
Our newest studio flash system features a built-in radio receiver and can be triggered with the Multiblitz RS^2 radio trigger up to distances of 30 m/100 ft. The featured IR slave cell can be switched off and the halogen modeling tube has a lifetime of 2,000 operating hours.

The XLITE provides a new generation of professional photographers with cutting-edge Multiblitz quality at very reasonable terms, and presents to the „more experienced" portraiture photographers an adequate substitute or a complementary alternative for their Mini-Studio or Variolite units (which are usually fully functional after more than 20 years of usage).

*Does not apply to MINI-STUDIO 202 flashes.

XLITE

Compatible battery packs and remotes:

XLITE 500 WS

RS² FLASH TRIGGER

X LITE FACTS

RS² COMPATIBLE

+ 500 WS FLASH OUPUT
+ 5 F-STOP POWER RANGE ADJUSTABLE IN 1/10 INCREMENTS
+ MODELING LAMP WITH A SERVICE LIFE OF 2000 HRS
+ SWITCHABLE SLAVE-CELL
+ BUILT-IN 16 CHANNEL WIRELESS RECEIVER WITH 30M RANGE, COMPATIBLE WITH THE MULTIBLITZ RS² RADIO TRIGGER.
+ DIGITAL DISPLAY AND FAST DIAL DIGITAL OUTPUT CONTROL

+ AUTOMATIC DISSIPATION OF ENERGY WITHOUT FIRING
+ OPTICAL AND/OR ACOUSTIC FIRING MONITOR
+ AUTOMATED FAN COOLING
+ FULLY COMPATIBLE WITH ALL LIGHT MODIFIERS OF THE MINI-STUDIO AND VARIOLITE PRODUCT LINE AND OTHER V-TYPE BAYONET SYSTEMS

TECHNICAL DATA		500
FLASH POWER	J(WS)	500
POWER SUPPLY	V	220 - 240
GUIDE NUMBER, ISO 100	REFLECTOR RINOS-2	64,0
F-STOP, 1 M, ISO 100	REFLECTOR RINOS-2	64,0
CONTROL RANGE (ADJUSTABLE IN 1/10 POWER INCREMENTS)	F-STOPS / J(WS)	5 / 31,25 - 500
RECYCLING TIME	SEC	P 1/16 = 0,5, P 1/1 = 1,7
FLASH DURATION T 0.5	SEC	P 1/16=1/500, P 1/1=1/1000
HALOGEN MODELLING LIGHT, W / SOCKET / CODE	W	205 / B 15D / LUHAL 3
COLOUR TEMPERATURE (AT MAX. OUTPUT)	K	5500 +/- 150°
SYNC SOCKET	V	< 5
FLASH VOLTAGE STABILITY		+/- 0,5 %
FLASH TUBE, UV ABSORBING, CODE		XROW / XROR
FLASH TRIGGERING		PHOTO CELL, SYNC CABLE, OPEN FLASH BUTTON (TEST), INFRA-RED, RADIO (WITH RS 2 RADIO TRIGGER)
CONNECTED LOAD		230 V / 4 A / 0.96 KVA
ELECTRIC SAFETY		DIN IEC 491, VDE 0882
DIMENSIONS	MM	363 X 146 X 146
WEIGHT	KG	2,6

Tolerances of the technical data for measured values and components according to the standard DIN IEC // Subject to technical changes
Reflector not included with single unit!

XSYSTEM
X5 X10 X15
AC/DC

A NEW BREED OF HIGH-PERFORMANCE FLASHES: SPEED REDEFIND

We proudly introduce an entirely new kind of premium compact flashes – The MULTIBLITZ X SYSTEM. It's features are perfectly suited to fulfill the high standards of commercial and advertisement photography.

The new „SpeedMode" enables simultaneous charging and firing of the units. Up to 20 flashes per second make the X SYSTEM especially valuable for freeze-photography. The new X SYSTEM comes in three different versions: The X5 (160-265V, 500 Ws), the X10AC/DC (80-265V, 1000 Ws), and the X15 (160-265V, 1500 Ws). In developing the X SYSTEM we strictly followed the high technical standards of professional digital cameras and created a compact studio flash that operates extremely fast,

with high precision, and highly efficient. The X SYSTEM features a vast control range of 10 f-stops, which allows a controlled output as low as 1 Ws. The flash output can be adjusted in 1/10 increments and the „Fast-Dial" function allows quick adjustments between low and high output.
The X5 and X15 flashes are particularly desigend for mains operation in the 220-240V range to achieve incredibly short recycle times as low as 0.05 sec, and lightning fast flash durations down to 1/4500 sec (t 0.5). Multiblitz's built-in "VOLTAGE TOLERANCE TECHNOLOGY" ensures a safe operating voltage range of 160-265V, guarentees a consistent flash stability, and protects the X SYSTEM from power grid voltage fluctuations.

The X SYSTEM can take on any floor pack in its class. It offers exceptional performance. Powerful, versatile, and fast - without the extra handling of lamp heads.

XSYSTEM FACTS

RS² COMPATIBLE   **TRIGGER HAPPY COMPATIBLE**

+ AVAILABLE IN 500 WS (X5), 1000 WS (X10AC/DC), AND 1500 WS (X15)
+ X5 & X15 WITH VOLTAGE TOLERANCE TECHNOLOGY: 160-265 V. DESIGNED FOR STUDIO OPERATION WITH 220 V
+ X10AC/DC WITH TRUE MULTI VOLTAGE TECHNOLOGY: 80-265 V. DESIGNED FOR STUDIO- AND BATTERY OPERATION (WITH PROPAC 1 & PROPAC 2 BATTERY PACK)
+ SIMULTANEOUS FIRING AND RECHARGING WITH MULTIBLITZ'S SPEED MODE TECHNOLOGY
+ RECYCLE TIMES FROM 0.05 SEC.
+ FLASH DURATION FROM 1/4500 SEC. (T 0,5)
+ FAST DIAL OUTPUT CONTROL
+ SPEED MODE DISPLAY

+ STABILIZED COLOUR TEMPERATURE
+ ADJUSTABLE VIA 10 F-STOPS. MINIMUM FLASH POWER: 1 WS.
+ PHOTO CELL/IR RECEIVER SWITCHABLE
+ BUILT-IN 16 CHANNEL WIRELESS RECEIVER, COMPATIBLE WITH RS2 TRIGGER AND TRIGGER HAPPY REMOTE
+ BUILT-IN PRE-FLASH ELIMINATOR „RED EYE/ TTL/ E-TTL"
+ 310 FLASHES WITH X10AC/DC AT FULL OUTPUT WITH PROPAC 1
+ 650 FLASHES WITH X10AC/DC AT FULL OUTPUT WITH PROPAC 2

XSYSTEM

500 | 1000 | 1500 Ws

Compatible battery packs
and remotes:

X15
1500 WS

PROPAC 1 &
PROPAC 2

X10 AC/DC
1000 WS

RS²
FLASH TRIGGER

X5
500 WS

TRIGGER HAPPY
REMOTE CONTROL

TECHNICAL DATA		500	1000	1500
FLASH POWER	J(WS)	500	1000	1500
GUIDE NUMBER, ISO 100		96.45	118.75	142.02
F-STOP, 1M, ISO 100		90.2	90.8	126.3
POWER INCREMENTS	F-STOPS /	10 /	10 /	10 /
	J (WS)	0.98 - 500	1.95 - 1000	2.93 - 1500
FLASH VOLTAGE STABILITY		0.05%	0.05%	0.05%
FLASH DURATION T 0,5	MIN. SEC	1/4500	1/4000	1/3300
	MAX. SEC	1/1000	1/800	1/800
COLOUR TEMPERATURE	MAX.POWER (K)	5500	5500	5500
MEASURED WITH COATED FLASH TUBE	10.0 TO 5.0 (K)	+-50	+-50	+-50
	10.0 TO 1.0 (K)	+-150	+-150	+-100
COLOUR TEMPERATURE STABILIZED		YES	YES	YES
RECYCLE TIME, SEC	230V	0.6	1.6	1.4
		0.05	0.05	0.05
	110V OR PROPAC	-	2.4	-
RECYCLING TIME OPTAINABLE FLASHES PER SECOND	F/S	20	20	20
FAN COOLED		YES	YES	YES
SPEED MODE		YES	YES	YES
SLOW-CHARGE-MODE		YES	YES	YES
SYNCHRONISATION		SYNC LEAD, RADIO SLAVE,CELL, IR		
BUILT-IN 16 CHANNEL RADIO RECEIVER		YES	YES	YES
COMPATIBLE WITH:	TRIGGER HAPPY	YES	YES	YES
	RS²	YES	YES	YES
BUILT-IN PRE-FLASH ELIMINATOR		YES	YES	YES
SYNC VOLTAGE	V	<5	<5	<5
MODELING LIGHT	W/V	205/230	205/230	650/240
ONLY IN COMBINATION WITH PROPAC OR 110V~	W/V	–	150/110	–
HOLGEN TUBE	230V	LUHAL 3	LUHAL 3	VAJOG 2
	110V OR PROPAC	–	PACHAL	–
POWER SUPPLY	V	160-265	80-265	160-265
CONNECTED LOAD	VA	1500	1500	1500
BATTERY OPERATION (PROPAC)		–	YES	–
NUMBER OF FLASHES AT FULL OUTPUT WITH PROPAC1		–	310	–
NUMBER OF FLASHES AT FULL OUTPUT WITH PROPAC2		–	650	–
RADIO INTERFERENCE SUPPRESSION		ACCORDING TO CE, DIN IEC 491, VDE 0882		
DIMENSIONS	MM	137 X 137 X 417	137 X 137 X 417	137 X 137 X 470
WEIGHT	KG	3.9	4.2	4.8

Tolerances of the technical data for measured values and components according to the standard DIN IEC // Subject to technical changes
Reflector not included with single unit!

PRO**PAC** $^{1+2}$
BATTERY PACKS

NO LIMITS! COMPACT AND DURABLE POWER FOR OUTDOORS

The PROPAC battery packs are built to be pushed to the extremes. Their sturdy appearance and minimalist design stand for everything a professional asks for: "Rock solid performance". A PROPAC delivers energy for two PROFILUX PLUS or two X10 units*, making any combination of units with flash outputs from 200 to 2000 Ws possible. Two powerful PROPAC versions are available: PROPAC 1 and PROPAC 2, they differ in weight, measurement, and capacity. Compared to the PROPAC 1, the PROPAC 2 offers more than twice the amount of flashes when fully charged. A big advantage compared to similar systems is that the PROPACs do not need to be monitored by a built-in thermal cut-out, endless flash repetitions are possible even when in extreme use. A PROPAC can deliver its full capacity of flashes without having to switch off due to overheating after just 50 or 100 flashes.

*Combinations of X10 AC/DC with Profilux Plus units are possible.

PROPAC 1+2
FACTS

+

+ HIGH-PERFORMANCE BATTERY PACKS WITH TWO LAMP SOCKETS FOR CONNECTION OF PROFILUX PLUS UNITS AND X SYSTEM UNIT (X-10)

+ PROPAC 1 DELIVERS 300 FLASHES WITH ONE PROFILUX PLUS 800 AT FULL OUTPUT

+ PROPAC 2 DELIVERS 650 FLASHES WITH ONE X10AC/DC AT FULL OUTPUT

+ "AUTO -OFF " FUNCTION TO CONSERVE BATTERY POWER WHEN WORKING WITH MODELING LIGHT

+ ENDLESS FLASH REPETITIONS POSSIBLE, NO THERMAL CUT-OUT AFTER JUST 50 OR 100 FLASHES

+ LAMP SOCKET "I" ALSO SERVES AS CHARGE INLET

+ RECYCLE TIMES WITH ONE OR TWO PROFILUX PLUS UNITS: FROM 0.9 SEC.

+ ASYMMETRIC OUTPUT CONTROL POSSIBLE WHEN OPERATING TWO PROFILUX PLUS UNITS ON THE SAME BATTERY PACK

PRO**PAC**¹⁺²

PROPAC 1

PROPAC 2

PRO**FILUX** *plus* COMPATIBLE

X**SYSTEM** COMPATIBLE X10 AC/DC

TECHNICAL DATA		PROPAC 1	PROPAC 2
LAMP SOCKETS (SPLASH PROOF)		2	2
OBTAINABLE PERFORMANCES			
WITH 1 PROFILUX PLUS UNIT	MAX. Ws	200/400/800	
WITH 1 X10 AC/DC UNIT	MAX. Ws	1000	
OBTAINABLE PERFORMANCES			
WITH 2 PROFILUX PLUS UNITS	MAX. Ws	400/600/800 / 1000/1200/1600	
WITH 2 X10 AC/DC UNIT	MAX. Ws	2000	
MODELING LIGHT OPERATION WITH "AUTO-OFF" FEATURE*		YES	YES
NUMBER OF FLASHES:			
WITH 1x X10 AC/DC AT FULL OUTPUT**	COUNT	310	650
WITH 1x PROFILUX PLUS 200 AT FULL OUTPUT**	COUNT	1400	3200
WITH 1x PROFILUX PLUS 400 AT FULL OUTPUT**	COUNT	700	1600
WITH 1x PROFILUX PLUS 800 AT FULL OUTPUT**	COUNT	300	800
RECYCLING TIME:			
WITH 1 AND 2 X10 AC/DC AT FULL OUTPUT	SEC	2.4	2.4
WITH 1 AND 2 PROFILUX PLUS 200 AT FULL OUTPUT	SEC	0.9	0.9
WITH 1 AND 2 PROFILUX PLUS 400 AT FULL OUTPUT	SEC	1.8	1.8
WITH 1 AND 2 PROFILUX PLUS 800 AT FULL OUTPUT	SEC	3.7	3.7
RECHARGE TIME AT 110 V / 230 V (WHEN FULLY DISCHARGED)	HRS	4	4.5
DIMENSIONS (W X L X H)	MM	166 X 219 X 210	166 X 219 X 296
WEIGHT	KG	8.8	12.0

* If a unit isn't fired for 15 sec., the modeling light switches off automatically in order to preserve battery power. It turns on again after the unit is fired. // ** Propac fully charged, without modeling-light, flash count halves with two units connected.
Tolerances of the technical data for measured values and components according to the standard DIN IEC // Subject to technical changes

PAC-1 battery pack, for 2 PROFILUX PLUS or X10 units, 8,8 kg, capacity: Over 1400 flashes

PAC-2 battery pack, for 2 PROFILUX PLUS or X10 units, 12 kg, capacity: Over 3200 flashes

PACLA multi-voltage charger

PACKIT-T1 Trolley for PACKIT 1 with bag

PACNET lamp cable, PROPAC to PROPLUS or X10, 5 m
PACNET E extension cable, for PACNET, 3 m

USE WITH: * PROFILUX PLUS/ **X SYSTEM WHEN BATTERY OPERATED

PLUSKLA*/ LUKLA-1* pyrex dome

PACHAL* halogen tube, 150 W/ 110-130 V

*REMOTE***CONTROLS**

by *Multiblitz*

TRIGGER*HAPPY*

ABSOLUTE CONTROL

Experience absolute control over all functions of your PROFILUX PLUS or X SYSTEM with one handy remote control. Just attach the TRIGGER HAPPY remote to the flash shoe of your camera and then go ... well, trigger happy: Trigger and control up to 16 units at once, assign up to 16 IDs, adjust the flash output, cycle thru modeling light settings and switch your whole flash set-up On or Off. You can execute all these adjustments with just a push of a button. The smart and innovative "Easy Clip" feature helps you create layer masks within your favourite photo editing software with a minimum of effort.

TRIGGER HAPPY REMOTE CONTROL +

FACTS:
+ 16 ASSIGNABLE CHANNELS FOR CONTROL OF UP TO 16 UNITS
+ 16 ASSIGNABLE IDs (PER CHANNEL) FOR CREATION OF UP TO 16 SUBGROUPS
+ OUTPUT CONTROL IN 1/10 F-STOPS
+ FLASH TRIGGERING
+ MODELING LIGHT CONTROL: ON (PROPORTIONAL), OFF, 100%
+ OPEN FLASH BUTTON CONTROL (TEST)
+ SYSTEM ON-OFF
+ "EASY CLIP" FEATURE FOR EFFORTLESS CREATION OF CLIPPING PATHS IN ANY PHOTO EDITING SOFTWARE

TECHNICAL DATA:
+ 16 CHANNEL/16 ID WIRELESS RADIO REMOTE CONTROL
+ OPERATION DISTANCE: 60 M
+ WORKING FREQUENCY: 868 MHZ
+ SYNC SPEED: 1/500 SEC
+ LOW VOLTAGE OPERATION: < 5V
+ POWER SUPPLY: 2 x AA BATTERY
+ DIMENSIONS: 60 x 60 x 40 MM

SCOPE OF DELIVERY:
+ TRIGGER HAPPY REMOTE
+ CAMERA CABLE
+ 2 x AA BATTERY

Compatible with: PROFILUX plus XSYSTEM

RS²
16 CHANNEL WIRELESS TRIGGER

GET IN SYNC

Get your camera in sync with up to 16 PROFILUX PLUS or X SYSTEM units at a time. The RS² operates with a range of up to 60 meters and 1/500 leaf shutter speed. Low voltage operation and easy handling ensures flawless flash triggering with all professional cameras.

RS² FLASH TRIGGER   +

TECHNICAL DATA:

+ 16 CHANNEL WIRELESS FLASH TRIGGER
+ MAX. OPERATION DISTANCE: 60 M
+ WORKING FREQUENCY: 868 MHZ
+ SYNC SPEED: 1/500 SEC
+ LOW VOLTAGE OPERATION: < 3 V
+ POWER SUPPLY: 2 X AA BATTERY
+ THE RS² IS COMPATIBLE WITH:
  · PROFILUX ECO
  · PROFILUX PLUS
  · X SYSTEM
  · MURAS R* WIRELESS RECEIVER
+ DIMENSIONS: 65 X 42 X 49 MM

SCOPE OF DELIVERY:

+ RS² TRIGGER
+ CAMERA CABLE
+ 2 X AA BATTERY

Compatible with: PROFILUX   PROFILUX plus   X SYSTEM   X LITE

*discontinued

X SLAVE
4 CHANNEL WIRELESS TRIGGER KIT

SLAVE IT

This easy to use radio trigger system is the tool you need when you want to sync a flash unit to your camera without using a sync cable. The battery powered X SLAVE features 4 synchronisation channels and up to 1/250 leaf shutter speed. With an operation distance of up to 30 m the X SLAVE provides all the freedom you need if you want to go wireless.

X SLAVE FLASH TRIGGER

TECHNICAL DATA:

+ 4 CHANNEL WIRELESS RADIO FLASH TRIGGER
+ MAX. OPERATION DISTANCE: 30 M
+ WORKING FREQUENCY 433 MHZ.
+ SYNC SPEED 1/250 SEC.
+ LOW VOLTAGE OPERATION
+ MAX. SYNC VOLTAGE: 100 V.
+ TRANSMITTER BATTERY (INCLUDED): 23A 12V
+ RECEIVER BATTERY (NOT INCLUDED): 2 X AAA
+ THE X SLAVE WORKS WITH ALL MULTIBLITZ
  FLASHES AND ALSO WITH FLASHES FROM
  OTHER MANUFACTURES

SCOPE OF DELIVERY:

+ RECEIVER
+ TRANSMITTER
+ 6.3 MM ADAPTER PLUG
+ 3.5 MM ADAPTER PLUG
+ CAMERA CABLE

Compatible with: COMPACT plus   PROFILUX 200   PROFILUX plus   X SYSTEM   X LITE

BAYONET
halogen

THE PROFESSIONAL HALOGEN SYSTEM

WATTS UP

The PRO X System is the professional, continuous lighting solution for photography, and a lot of video applications. It is the most compact, lightweight and powerful continuous lighting system available today. A PRO X halogen lamp can optionally be equipped with a 650 or 1000 W halogen tube. The tubes are exceptionally durable, with life cycles of 75 hrs (1000 W) and 50 hrs (650 W).

The colour temperature is at 3200°K. A cooling fan assures dependability during heavy-duty operation. Heat resistant softboxes with dimensions of 60x60 and 60x80 cm were exclusively designed for the PRO X System. A vast assortment of reflectors, gels, rotating 4-flap barn doors and umbrellas tops the system off. The PRO X "to go" Kit with two units, two light stands and two 4-flap barn doors is available in a padded carrying case or a multifunctional backpack.

PRO X
halogen 650 | 1000 W

IMAGE BY: THOMMY MARDO // WWW.THOMMY-PHOTOGRAPHY.DE /// MODEL: BINTIA

PRO X
halogen 650 | 1000 | 1250 W

**PRO X
1000 W**

**PRO X
650 W**

HALOGEN +

FACTS:

+ SYSTEM VOLTAGE: 220–240 V
+ FAN-COOLED
+ WIDE RANGE OF HEAT RESISTANT
  LIGHT SHAPERS
+ COLOUR TEMPERATURE: 3200° K
+ P-TYPE BAYONET MOUNT

TECHNICAL DATA:

+	HALOGEN LIGHT	W	650 / 1000
+	HALOGEN TUBE	W	UHAL-6/ -10
+	DIMENSIONS (WxLxH)	MM	110 X 135 X 95
+	WEIGHT	KG	1.2

The PRO X "to go" Kit with two units, two light stands and two 4-flap barn doors is available in a padded soft case or a multifunctional backpack.

KIT (PROXKIT 6/10)

2 PRO X halogen lamps (PROXSTU)
  (units include halogen tubes, protection cap,
  protection glas)
2 4-flap barn doors (PROXAB)
2 Light stands (COMSTA S)
1 Padded soft case (COMBAG)
  or optionally:
1 Multifunctional backpack (MURUCK)
  with laptop compartment, soft box
  compartment, additional
  light stand case and rain cover.

MULTIBLITZ
KITS & BUNDLES

COMPACT plus

COMPACT PLUS 200 LOCATION KIT
(COMKIT BAG/RUCK)

CONTENT:

+ **2 COMPACT PLUS units (COMSTU)**
  (units include, flash tube, halogen tube,
  sync cable, mains cable & protection cap)
+ 4 channel radio trigger kit (X SLAVE)
+ 2 Umbrella reflectors (PLUSCH)

+ 2 Reflective umbrellas (VARES)
+ 2 „Air-cushioned" light stands (COMSTA B)
+ 1 Padded soft case (COMBAG)
  or optional (surcharge):
+ 1 Bagpack (MURUCK)

COMPACT plus

COMPACT PLUS 200 COMFORT KIT
(COMKOM)

CONTENT:

+ **3 COMPACT PLUS units (COMSTU)**
  (units include, flash tube, halogen tube,
  sync cable, mains cable & protection cap)
+ 4 channel radio trigger kit (X SLAVE)
+ 2 Umbrella reflectors (PLUSCH)

+ 2 Reflective umbrellas (VARES)
+ 1 Standard reflector (FILNOS)
+ 3 „Air-cushioned" light stands (COMSTA B)
+ 1 Padded soft case (ECOBAG-3)

PROFILUX ECO

PROFILUX ECO 250/500 ESSENTIAL KITS
(LUXKIT 2/5)

CONTENT:

+ **2 PROFILUX ECO units (LUXSTU 2/5)**
  (units include, flash tube, halogen tube,
  sync cable, mains cable & protection cap)
+ 2 Umbrella reflectors (PLUSCH)
+ 2 Reflective umbrellas (VARES)

+ 2 „Air-cushioned" light stands (COMSTA B)
+ 1 Padded soft case with casters
  (PROTRA -PLUS)

PROFILUX ECO 250/500 COMFORT KITS
(LUXKOM 2/5)

CONTENT:

+ **3 PROFILUX ECO units (LUXSTU 2/5)**
  (units include, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ 1 Standard reflector (FILNOS)
+ 1 Soft disc (COMSOF)
+ 1 Snoot with removable honeycomb insert
  (COMBUS)

+ 1 Softbox, 60 x 60 cm (PROFEX 60N)
+ 3 „Air-cushioned" light stands (COMSTA B)
+ 1 Padded soft case with casters (VATRA 3)
  or optional (surcharge):
+ 1 Hard case (PROKOF-PLUS)

PROFILUX PLUS 200/400/800 ESSENTIAL KITS
(PLUSKIT 2/4/8)

CONTENT:

+ **2 PROFILUX PLUS units (PROPLUS 2/4/8)**
  (units include, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ 2 Umbrella reflectors (PLUSCH)
+ 2 Reflective umbrellas (VARES)

+ 2 „Air-cushioned" light stands (COMSTA B)
+ 1 Padded soft case with casters (PROTRA PL)

PROFILUX PLUS 200/400/800 COMFORT KITS
(PLUSKOM 2/4/8)

CONTENT:

+ **3 Profilux Plus units (PROPLUS 2/4/8)**
  (units include, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ 1 Standard reflector (FILNOS)
+ 1 Soft disc (COMSOF)
+ 1 Snoot with removable honeycomb insert
  (COMBUS)

+ 1 Softbox, 60 x 60 cm (PROFEX 60N)
+ 3 „Air-cushioned" light stands (COMSTA B)
+ 1 Padded soft case with casters (VATRA 3)
  or optional (surcharge):
+ 1 Hard case (PROKOF-PLUS)

PROFILUX PLUS 200/400/800 ESSENTIAL OUTDOOR KITS
(PLUSKIT EO 2/4/8)

CONTENT:

+ **1 PROFILUX PLUS unit (PROPLUS 2/4/8)**
  (including, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ **1 PROPAC 1 battery kit (PACKIT 1)**
  (including, flash tube, halogen tube,
  sync cable, mains cable and protection cap)

+ 1 Umbrella reflector (PLUSCH)
+ 1 Reflective umbrella (VARES)
+ 1 „Air-cushioned" light stands (COMSTA B)
+ 1 Hard case (PROKOF-PLUS)

PROFILUX PLUS 200/400/800 COMFORT OUTDOOR KITS
(PLUSKOM CO 2/4/8)

CONTENT:

+ **2 PROFILUX PLUS units (PROPLUS 2/4/8)**
  (units include, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ **1 PROPAC 1 battery kit (PACKIT 1)**
  (including battery pack, 2 x lamp cable,
  charger, 2 x pyrex dome and 2 x halogen tube)

+ 1 Umbrella reflector (PLUSCH)
+ 1 Reflective umbrella (VARES)
+ 1 Softbox, 60 x 60 cm (PROFEX 60N)
+ 2 „Air-cushioned" light stands (COMSTA B)
+ 1 Hard case (PROKOF-PLUS)

PROFILUX PLUS 200 PORTRAITURE BUNDLE
(PLUSPAC 2 PB)

CONTENT:

+ **1 PROFILUX PLUS unit (PROPLUS 2)**
  (including, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ **1 PROPAC 1 battery kit (PACKIT 1)**
  (including battery pack, lamp cable, charger,
  pyrex dome and halogen tube)

+ 1 RS[2] Radio trigger (MURAS T)
+ 1 Softbox, 40 x 40 cm (COMFEX 40N)

PROFILUX PLUS 400 BEAUTY BUNDLE
(PLUSPAC 4 BB)

CONTENT:

+ **1 PROFILUX PLUS unit (PROPLUS 4)**
  (including, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ **1 PROPAC 1 battery kit (PACKIT 1)**
  (including battery pack, lamp cable, charger,
  pyrex dome and halogen tube)

+ 1 RS[2] Radio trigger (MURAS T)
+ 1 "3-in-1" Beauty Dish (PROBEAU SET)

PROFILUX PLUS 800 FASHION BUNDLE
(PLUSPAC 8 FB)

CONTENT:

+ **1 PROFILUX PLUS unit (PROPLUS 8)**
  (including, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ **1 PROPAC 1 battery kit (PACKIT 1)**
  (including battery pack, lamp cable, charger,
  pyrex dome and halogen tube)

+ 1 RS[2] Radio trigger (MURAS T)
+ 1 Octobox, Ø 150 cm (PROFOC-150)

PROPAC¹⁺²

PACKIT-1 (WITH PROPAC 1 BATTERY PACK)
PACKIT-2 (WITH PROPAC 2 BATTERY PACK)

For: **PROFILUX** *plus*

CONTENT:

+ Battery Pack (PAC 1/PAC 2)
+ Multi-Voltage Charger (PACLA)
+ Lamp cable (PACNET)
+ Halogen Tube (PACHAL)
+ Pyrex Dome (PLUSKLA)

PACKIT-1-V (WITH PROPAC 1 BATTERY PACK)
PACKIT-2-V (WITH PROPAC 2 BATTERY PACK)

For: **X10** AC/DC

CONTENT:

+ Battery Pack (PAC 1/PAC 2)
+ Multi-Voltage Charger (PACLA)
+ Lamp cable (PACNET)
+ Halogen Tube (PACHAL)
+ Pyrex Dome (LUKLA-1)

XSYSTEM

X SYSTEM 500/1000/1500 ESSENTIAL KITS
(X5 KIT/X10 KIT/X15 KIT)

CONTENT:

+ **2 X SYSTEM units (X5/-10/-15)**
  (units include, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ 2 Softboxes (RIFEX 60N) - X5 Kit

+ 2 Softboxes (RIREC 60N) - X10 Kit & X15 Kit
+ 1 Padded soft case with casters (VATRA-3)

XSYSTEM

X SYSTEM 1000 OUTDOOR KIT
(X10 OD KIT A/B/C/D)
With PROPAC trolley kit and selectable lightshapers.

CONTENT:

+ **1 X10 AC/DC unit**
  (including, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ **1 PROPAC 1 trolley kit (PACKIT-T1)**
  (including battery pack, lamp cable, charger,
  pyrex dome, halogen tube, and trolley with
  padded soft case)

+ 1 „Air-cushioned" light stand (XENOSTA)
+ 1 Padded soft case (COMBAG)
  selectable lightshapers:
+ 1 Softbox 80 x 140 (RIREC-80N) = X10 OD Kit A
+ 1 Octobox 90 cm (RIGLAM) = X10 OD Kit B
+ 1 Beauty reflector (RIBEAU SET)= X10 OD Kit C
+ 1 Octobox 150 cm (RIFOC 150)= X10 OD Kit D

XSYSTEM

X SYSTEM 500/1000/1500 COMFORT KITS
(XKOM 5/-10 /-15)

CONTENT:

+ **3 X SYSTEM units (XKOM 5/-10/-15)**
  (units include, flash tube, halogen tube,
  sync cable, mains cable and protection cap)
+ 2 Softboxes, 60 X 60 cm (RIFEX 60N)
+ 1 Standard reflector (LUNOS)

+ 1 Honeycomb filter* (LUWAN M)
+ 1 Hard case (XENOTRA)

* Not included in XKOM 15!

P BAYONET

DISCOVER VERSATILITY

Multibliz´ extensive range of professional, time-proven and compact P-type bayonet light shapers offers almost endless possibilities for every photographic application be it still-life, portraiture or fashion.

REFLECTORS, GELS & GRIDS

COMWAN-S/-M/-L
honeycomb filters,
Ø 16 cm,
for FILNOS/FILNOW

COMSOF
soft disc

FILNOS*
standard reflector,
silver, Ø 16 cm

FILNOW
standard reflector,
white, Ø 16 cm

RIWAN-3 S/-M/-L
honeycomb filters,
Ø 25 cm,
for FILNOS-2/
FILNOW-2

FILNOS-2*
standard reflector,
silver, Ø 25 cm

FILNOW-2
standard reflector,
white, Ø 25 cm

RISOF-3
soft disc
for FILNOS-2/
FILNOW-2

COMFIL
set of 8
colour filters

COL.MAGIC*
set of 12
colour filters

COMSAB-1
2-flap barn doors,
with filter clips
for FILNOS

PROXAB*
4-flap barn door,
with filter clips

RISAB-34*
4-flap barn door,
with filter clips for
FILNOS-2/FILNOW-2

PROFRE
FRESNEL spot,
w / integral diaphr.
lens, Ø 15 cm

COMBUS
snoot,
with honeycomb
insert, Ø 6 cm

COMVER
background reflector,
with filter clips

PLUSCH*
umbrella reflector,
Ø 13 cm

PROGLOB-25
360° surround light,
Ø 25 cm

PROGLOB
360° surround light,
Ø 50 cm

COMWEW
soft beam reflector,
white, Ø 35 cm

CODE 635103
deflector,
white

PROBEAU
beauty reflector,
white, Ø 44 cm,
with honeycomb
filter

WEWSOF
soft screen,
for COMWEW
& PROBEAU

NEW!

PROBEAU-SET
3-in-1-Beauty Dish

PROBEAU XL-SET
3-in-1-Beauty Reflector Set
Ø 70 cm

* Heat resistant up to 1250 W modeling light
 // Also for use with PRO X

OCTOBOXES & SOFTBOXES

PROFOC-120-R
Octobox (Recessed
for honeycomb grid
OCWAN 120),
Ø 120 cm

PROFOC-150
Octobox,
Ø 150 cm

PROGLAM-90
Octobox,
ø 90 cm

GLAMBOX⁹⁰

PROFEX-80N ❶
75 x 75 cm

RITUR-80N ❶

FEXWAN-80 ❷

PROREC-60N ❶
60 x 100 cm

PROTUR-N ❶

RECWAN-60 ❷

PROREC-80N
80 x 100 cm

NEW!

PROFOC-100P
Parabol Softbox,
ø 100cm,
Depth: 50 cm
incl. honeycomb grid

PRORIP-30N
30 x 120 cm

PROWAN-30 ❶

COMFEX-40
40 x 40 cm

PROFEX-60N ❶
60 x 60 cm

TEXWAB-60 ❶

P-Bayonet: *COMPACT plus*   *PROFILUX 200*   *PROFILUX plus*   *PRO X*

IMAGE BY: STEFAN DITNER

SOFTBOXES FOR PRO X**

X-FEX-60*
60 x 60 cm

TEXWAB-60*❶❶

X-REC-80*
60 x 80 cm

X-TUR* ❶
striplight insert,
for X-REC-80

TEXWAB-80* ❷

UMBRELLAS

VAREU
umbrella,
reversable,
silver/white,
Ø 110 cm

PROBROL
umbrella,
silver, Ø 150 cm

SUPERBROLLY

RESBO-M
umbrella,
white, Ø 100 cm

VARES*
umbrella,
white, Ø 80 cm

VATHRU*
umbrella,
translucent,
Ø 80 cm

* Heat resistant up to 1250 W modeling light // Also for use with PRO X
** Heat resistant up to 1250 W modeling light // Designed for PRO X

ACCESSORIES

MURAS-T (RS²)
radio trigger

MUSEN
IR trigger

PLUSTEN
antenna
for PROFILUX PLUS,
increases receiver
range from approx.
30 m to approx. 60 m

**TRIHAP
(TRIGGER HAPPY)**
16 channel/16 ID
remote control, for
PROFILUX PLUS

VANET-A
power cable, 5 m
(for PROFILUX PLUS/
PROFILUX ECO)

FILNET
power cable
(for COMPACT
PLUS)

MASYG
sync lead

PLUSKAP
protection cap

PLUSKLA
pyrex dome
for PROFILUX PLUS

PLUSROR/PLUSROW
flash tubes,
uncoated/coated
(for PROFILUX PLUS
200/400 Ws)

PLUSRER/PLUSREW
flash tube,
uncoated/coated
(for PROFILUX PLUS
800 Ws)

PROHAL
halogen tube,
70 W/220-240 V
(for PROFILUX PLUS
200 Ws)

LUHAL-2
halogen tube,
150 W/220-240 V
(for PROFILUX PLUS
400 Ws)

LUHAL-3
halogen tube,
205 W/220-240 V
(for PROFILUX PLUS
800 Ws)

PACHAL
halogen tube,
150 W/110-130 V
(for 110-130 V and
battery operation)

COMROR 4/COMROW 4
flash tubes,
uncoated/coated
(for PROFILUX ECO
250/500 Ws)

LUHAL 2
modeling lamp,
150 W/220-240 V
(for PROFILUX ECO
250 Ws)

LUHAL 3
modeling lamp,
205 W/220-240 V
(for PROFILUX ECO
500 Ws)

ECOROR / ECOROW
flash tubes,
uncoated/coated
(for COMPACT PLUS
200 Ws)

FILHAL
halogen tube,
60 W
(for COMPACT PLUS
200 Ws)

UHAL-6
U-shaped halogen
tubes,
650 W
(for PRO X Halogen)

UHAL-10
U-shaped halogen
tubes,
1000 W
(for PRO X Halogen)

P-Bayonet: COMPACT plus PROFILUX eco PROFILUX plus PRO X halogen

BAYONET

ENDLESS POSSIBILITIES

Multibliz´ extensive range of professional, time-proven V-type bayonet light shapers offers almost endless possibilities for every photographic application be it still-life, portraiture or fashion.

REFLECTORS, GELS & GRIDS

LUWAN S/-M/-L
honeycomb filters
for LUNOS
(for 250W max.)

LUNOS
standard reflector,
silver, 65°, Ø 18 cm

RIWAN-2 S/-M/-L
honeycomb filters
Ø 30 cm,
for RINOS-2/
RINOW-2

RINOS-2
standard reflector,
silver, 50°, Ø 30 cm

RINOW-2
standard reflector,
white, 50°, Ø 30 cm

RIWAN-3 S/-M/-L
honeycomb filters
Ø 25 cm,
for RINOS-3/
RINOW-3

RINOS-3
standard reflector,
silver, 65°, Ø 25 cm

RINOW-3
standard reflector,
white, 25°, Ø 25 cm

RIENG
narrow angle
reflector,
35°, Ø 33 cm

STUSCH
umbrella reflector
85°, Ø 13 cm

RISOF-2/-3
soft disc
for RINOS-2/-3
RINOW-2/-3

RIBUS
snoot,
with honeycomb
insert

RIVER
background reflector,
with filter clips,
Ø 30 cm

RASTU
FRESNEL spot,
w / integral diaphr.
lens, Ø 20 cm

RISAB-24/-34
4-flap barn door,
with filter clips
for RINOS-2/-3,
RINOW-2/-3

COL. MAGIC
set of 12
colour filters

RIGLOB
360° surround light,
Ø 50 cm

WABWEW
honeycomb filters,
RIWEW for
RIBEAU

CODE 635103
deflector,
white

RIBEAU
beauty reflector,
white, 75°,
Ø 44 cm

WEWSOF
soft screen,
for RIWEW
& RIBEAU
Ø 44 cm

NEW!

RIBEAU-SET
3-in-1-Beauty Dish

RIBEAU XL-SET
3-in-1 Beauty Reflector Set
Ø 70 cm

OCTOBOXES & SOFTBOXES

RIFOC-120-R
Octobox (Recessed),
Ø 120 cm

RIFOC-150
Octobox, Ø 150 cm

RIFOC-213
Octobox, Ø 213 cm

RIFOC-254
Octobox, Ø 254 cm

RIGLAM-90
Octobox Ø 90 cm

GLAMBOX90

RIFEX-110
110 x 110 cm

RITUR-110 ❶

FEXWAN-110 ❷

RIFEX-80N
80 x 80 cm

RITUR-80N ❶

FEXWAN-80 ❷

RIREC-80
80 x 140 cm

RECWAN-80 ❶

RIREC-60N
60 x 100 cm

PROTUR-N ❶
30 x 100 cm

RECWAN-60 ❷

RIRIP-30
30 x 140 cm

RECWAN-60 ❶

RIFEX-60N
60 x 60 cm

TEXWAB-60 ❶

V-Bayonet: XSYSTEM XLITE

UMBRELLAS

VAREU
umbrella,
reversable, silber/
white, Ø 110 cm

RIBROL
umbrella,
silver, Ø 150 cm

SUPERBROLLY

RESBO-M
umbrella,
white, Ø 100 cm

VARES
umbrella,
white, Ø 80 cm

VATHRU
umbrella,
translucent,
Ø 80 cm

ACCESSORIES

MURAS-T (RS²)
radio trigger

MUSEN
IR trigger

**TRIHAP
(TRIGGER HAPPY)**
16 channel/16 ID
remote control

VANET-A
power cable, 5 m

MASYG
sync lead

LUKAP
protection cap

LUKLA-1
pyrex dome
(110 V -130 V
operation)

RARER / RAREW
flash tubes,
uncoated/coated
(for X SYSTEM)

LUHAL-3
halogen tube,
205 W/
220-240 V
(for X5/X10
and XLITE 500)

VAJOG-2
halogen tube,
650 W/
220-240 V
(for X15)

PACHAL
halogen tube,
150 W/110-130 V
(for 110-130 V and
battery operation)

XROR / XROW
halogen tube,
uncoated/coated
(for XLITE 500)

NEW!

RIFOC-100P
Parabol Softbox,
ø 100 cm,
Depth: 50 cm
incl. honeycomb grid

V-Bayonet: *XSYSTEM*   *XLITE*

PLUS*CASE*

ONE FOR THE ROAD…

Introducing the most sophisticated transport solution ever available for a flash kit. This new rugged roadcase is designed for professionals who do not want to compromise when it comes to protecting their gear.

Due to the fact that the PROPAC battery packs do not heat up when operated, they can easily be left in the PLUSCASE during a shoot as well as during recharging.

KIT (PLUSCASE)

2   PROFILUX PLUS units (PROPLUS 2/4/8)
     (unit includes mains cable, sync cable,
     flash tube, halogen tube, protection cap)
1   PROPAC 1 battery kit (PACKIT 1)
     (including battery pack, 2 x lamp cable, charger,
      2 x pyrex dome, 2 x halogen tube)

HEAVY-DUTY HANDLES AND REELS
ensure safe and easy transportation.

Compatible with: PROFILUX   PROFILUX plus   PROPAC

HARD CASES

XENOTRA-3
hard case
for three XENOLUX/
X SYSTEM units,
75 x 21 x 60 cm

PROKOF-PL
hard case
for three PROFILUX
PLUS units, two
PROFILUX PLUS
units & one PROPAC
1 battery pack or
three PROFILUX
ECO units,
68 x 21 x 52 cm

PLUSCASE
heavy duty flight case
w/casters
for two PROFILUX
PLUS units and one
PROPAC 1/PROPAC
2 battery pack,
72,5 x 28 x 50 cm

SOFT CASES

VATRA-3
padded soft case
w/casters
for three PROFILUX
PLUS/PROFILUX
ECO units, two
XENOLUX 250/500/
X SYSTEM units,
70 x 24 x 53 cm

MUBAG-120
padded soft case
w/fixation straps
for Manfrotto tripods
and XENOSTA
light stands and
other accessories,
120 x 25 cm

ECOBAG-3
padded soft case
w/fixation straps
for three
COMPACT PLUS
units
71 x 18 x 37,5 cm

STABAG-100
padded soft case
w/fixation straps
for XENOSTA light
stands and other
accessories,
100 x 20 cm

PROTRA-PL
padded soft case
w/casters
for two
PROFILUX PLUS/
PROFILUX ECO
units,
76 x 27 x 23 cm

XENOBAG
padded soft case
for two XENOLUX
250/500 units,
91 x 24 x 30 cm

COMBAG
padded soft case
for two COMPACT
PLUS/DIGI X/
PRO X units,
70 x 24 x 24 cm

TROKIT-1
trolley kit
for PROPAC 1
battery,
105 x 36 x 44 cm

MURUCK
backpack,
for two COMPACT PLUS/ DIGI X/ PRO X/
PROFILUX ECO units. With additional light
stand/softbox case and integrated rain cover,
40 x 22 x 50 cm

BEAU-CASE
Shaper case
for 3-in-1
Beauty Reflector
ø 50cm,
depth: 20 cm

BEAU-CASE-XL
Shaper case
for 3-in-1
Beauty Reflector
ø 70,
depth: 30 cm

LIGHT STANDS

COMSTA B
air-cushioned light stand
Folded Length: 665 mm
Min. Height: 770 mm
Max. Height: 2150 mm
Max. Load: 5 Kg
Max. tube Diameter: 25 mm
Net Weight: 1.1 kg

XENOSTA
air-cushioned light stand
Folded Length: 920 mm
Min. Height: 1000 mm
Max. Height: 2420 mm
Max. Load: 8 Kg
Max. tube Diameter: 29 mm
Net Weight: 1.5 kg

LIGHTSTAND KITS

STAKIT-2
2x air-cushioned
XENOSTA light
stand
1x padded soft case
STABAG-100

STAKIT-3
3x air-cushioned
XENOSTA light
stand
1x padded soft case
STABAG-100

BACKGROUND**PAPER**
by **multiblitz**

IMAGES BY: DOMINIQUE GIANELLI & ANNE-LISE LARCHER

BACKGROUND PAPER FOR STUDIO PHOTOGRAPHY

COLOR	2,72 X 11 m	1,35 X 11 m	2,72 X 45,72 m	3,56 X 30 m
	CODE	CODE	CODE	CODE
SUPER WHITE	129-A-1	129-A-2	129-A-4	129-B-3
SOFT GRAY	90-A-1			
ALASKA BLUE	100-A-1	14-A-2		
PASTEL PINK	117-A-1			
STRAW	128-A-1			
DEEP BLUE	108-A-1			
RED	124-A-1	124-A-2		
TERRACOTTA	139-A-1			
FLAMETONE	111-A-1			
PHOTOGRAPHERS GRAY	153-A-1	153-A-2		
SUNFLOWER	138-A-1			
SILVER GRAY	127-A-1			
HICKORY	113-A-1			
JADE	137-A-1	137-A-2		
BLACK	101-A-1	101-A-2	101-A-4	101-B-3
TANGERINE	152-A-1			
PONGEE	121-A-1			
STEEL GRAY	150-A-1			
VIOLET	133-A-1			
PATRIOT BLUE	161-A-1			
BLUE HAVEN	103-A-1	103-A-2		
ERMIN GRAY	110-A-1			
FOTO GREEN	162-A-1			
HOT PINK	163-A-1			
DAF-FO-DIL	107-A-1	107-A-2		
MISTI BLUE	115-A-1			
VERI GREEN	132-A-1			132-B-3
AQUA	165-A-1			
WHITE	134-A-1			
CREAM	106-A-1	106-A-2		
NATURAL	81-A-1			
THUNDER GRAY	131-A-1	131-A-2		
GRAYSTONE	112-A-1			
BLU GRAY	102-A-1			
FOTO BLUE	136-A-1	136-A-2		
PLAZA GRAY	119-A-1	119-A-2		
PURSUIT GRAY	123-A-1			
PURPLE	154-A-1			
IVORY	155-A-1			
REGATTA BLUE	126-A-1			
REGAL BLUE	125-A-1			
RUBY	156-A-1			
TEAL	157-A-1			
STORM GRAY	159-A-1			159-B-3
MARIGOLD	169-A-1			
STONE GRAY	170-A-1			
DARK GRAY	172-A-1			
CORTEZ BLUE	173-A-1			
DOVE GRAY	109-A-1		109-A-4	
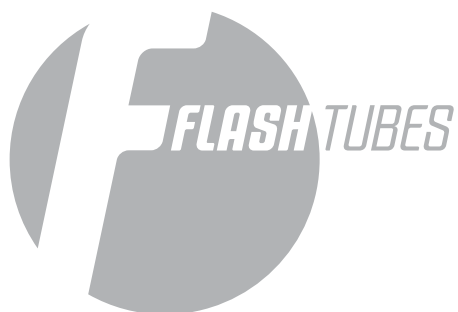
**ARRER/ARREW
flash tube,**
uncoated/coated
for VARI-5

**ARROR / ARROW
flash tube,**
uncoated/coated
for VARI-2

**COMROR / COMROW
flash tube,**
uncoated/coated
for PROFILITE
COMPACT 300

**COMROR-4 / COM-
ROW-4
flash tube,**
uncoated/coated
for PROFILUX ECO,
PROFILUX CLASSIC
200/400, PROFILITE
COMPACT 400

**ECOROR / ECOROW
flash tube,**
uncoated/coated
for COMPACTLITE/
COMPACT PLUS/
COMPACT PLUS
MK2

**FILROR / FILROW
flash tube,**
uncoated/coated
for PROFILITE
COMPACT 200

**LITROR / LITROW
flash tube,**
uncoated/coated
for MINILITE 200

**LUSROR
flash tube,**
uncoated
for VARISPOT 500

**MARER / MAREW
flash tube,**
uncoated/coated
for BL 32/40/41

**MAROR / MAROW
flash tube,**
uncoated/coated
for BL 16/20/24

**MAROR-S / MAROW-S
flash tube,**
uncoated/coated
for BL 24S

**MASER / MASEW
flash tube,**
uncoated/coated
for BL 32/40/41

**MASER-2
flash tube,**
uncoated
for SPOTLITE 64

**MASOR / MASOW
flash tube,**
uncoated/coated
for SPOTLITE 16/20

**MASUR / MASUW
flash tube,**
uncoated/coated
for SPOTLITE 32/40

**MIRER-8 / MIREW-8
flash tube,**
uncoated/coated
for MINISTUDIO
800/802

**MUROR / MUROW
flash tube,**
uncoated/coated
for MINISTUDIO
303/606/606S

**PLUSRER / PLUSREW
flash tube,**
uncoated/coated
for PROFILUX PLUS
600/800

**PLUSROR / PLUSROW
flash tube,**
uncoated/coated
for PROFILUX PLUS
200/400

**PRORER / PROREW
flash tube,**
uncoated/coated
for POFILUX 600

**RARER / RAREW
flash tube,**
uncoated/coated
for X 5/10/15,
XENOLUX
1000/1500,
VARILUX
1000/1500,
VARIOLITE
COMPACT
900/1200/1800

**RIRER / RIREW
flash tube,**
uncoated/coated
for VARIOLITE
250/500,
MINISTUDIO
250/252/400/402

**STUROR / STUROW
flash tube,**
uncoated/coated
for XENOLUX
250/500,
VARILUX 250/500,
VARIOLITE
COMPACT 300/600,
STUDIOLITE 500

**XROR / XROW
flash tube,**
uncoated/coated
for XLITE 500

HALOGEN TUBES

COMJO-2
halogen tube
200W 240V
for PROFILITE
COMPACT 300/400

FILHAL-2
halogen tube
60W 230V,
for COMPACT
PLUS MK2,
COMPACT PLUS,
COMPACTLITE,
DIGILITE

LUHAL-2
halogen tube
150W 230V,
for PROFILUX ECO
250, PROFILUX
PLUS 400

LUHAL-3
halogen tube
205W 230V,
for PROFILUX ECO
500, PROFILUX
PLUS 600/800,
X 5/10,
XENOLUX 250/500,
VARI 5, VARILUX
500/1000/1500,
XLITE 500

MAJOG
halogen tube
1000W 230V
for SPOTLITE 64/80

MIJOD
halogen tube
50 W 120V
for MINILITE 200,
MINISPOT 200,
PROFILITE
COMPACT 200,
VARISPOT 250

MIJOH
halogen tube
100W 12V
OSRAM 64625 HLX
for MINISTUDIO
202

MUHAL-2
halogen tube
150W 230V
for MINISTUDIO
303/606

MUHAL-3
halogen tube
205W 230V
for MINISTUDIO
606S

PACHAL
halogen tube
150W 110V
for X10,
PROFILUX PLUS
200/400/600/800
(for 110-130V
mains- or battery
operation only)

PROHAL
halogen tube
70W 230V
for PROFILUX PLUS
200, PROFILUX 200

VAJOG
halogen tube
650W 250V
for VARIO
1000/1500,
SPOTLITE 32/40

VAJOG-2
halogen tube
650W 240V
for X 15, XENOLUX
1000/1500,
BL 16/20/
24S/32/40/41/
2x32/2x40,
STUDIOLITE
500/1000/
1500/2000,
VARILUX
1000S/1500S,
VARIOLITE
1000/2000,
VARIOLITE
COMPACT
600/900/1200/
1800, SPOT 32

VAJOW-2
halogen tube
300W 240V
for MINISTUDIO
400/402/800/802,
PASSLITE,
SPOTLITE 16/20,
STUDIOLITE 500,
VARIO 250/350/
500/700,
VARIOLITE
250/500,
VARIOLITE
COMPACT 300

UHAL-6
U-shaped halogen
tube,
650 W
(for PRO X Halogen)

UHAL-10
U-shaped halogen
tube,
1000 W
(for PRO X Halogen)

THE FACES BEHIND
MULTIBLITZ

MANAGEMENT

FALK WULMS

VEIT WULMS

MARCEL SÜRIG

DEVELOPMENT

RAINER GUTE

MARC OBERDÖRSTER

JENS WINKELMANN

SALES

ROBERT A. RAATZ   EDITH HORSTMANN   CORINNA MAYER   MARLIS RÖHLING

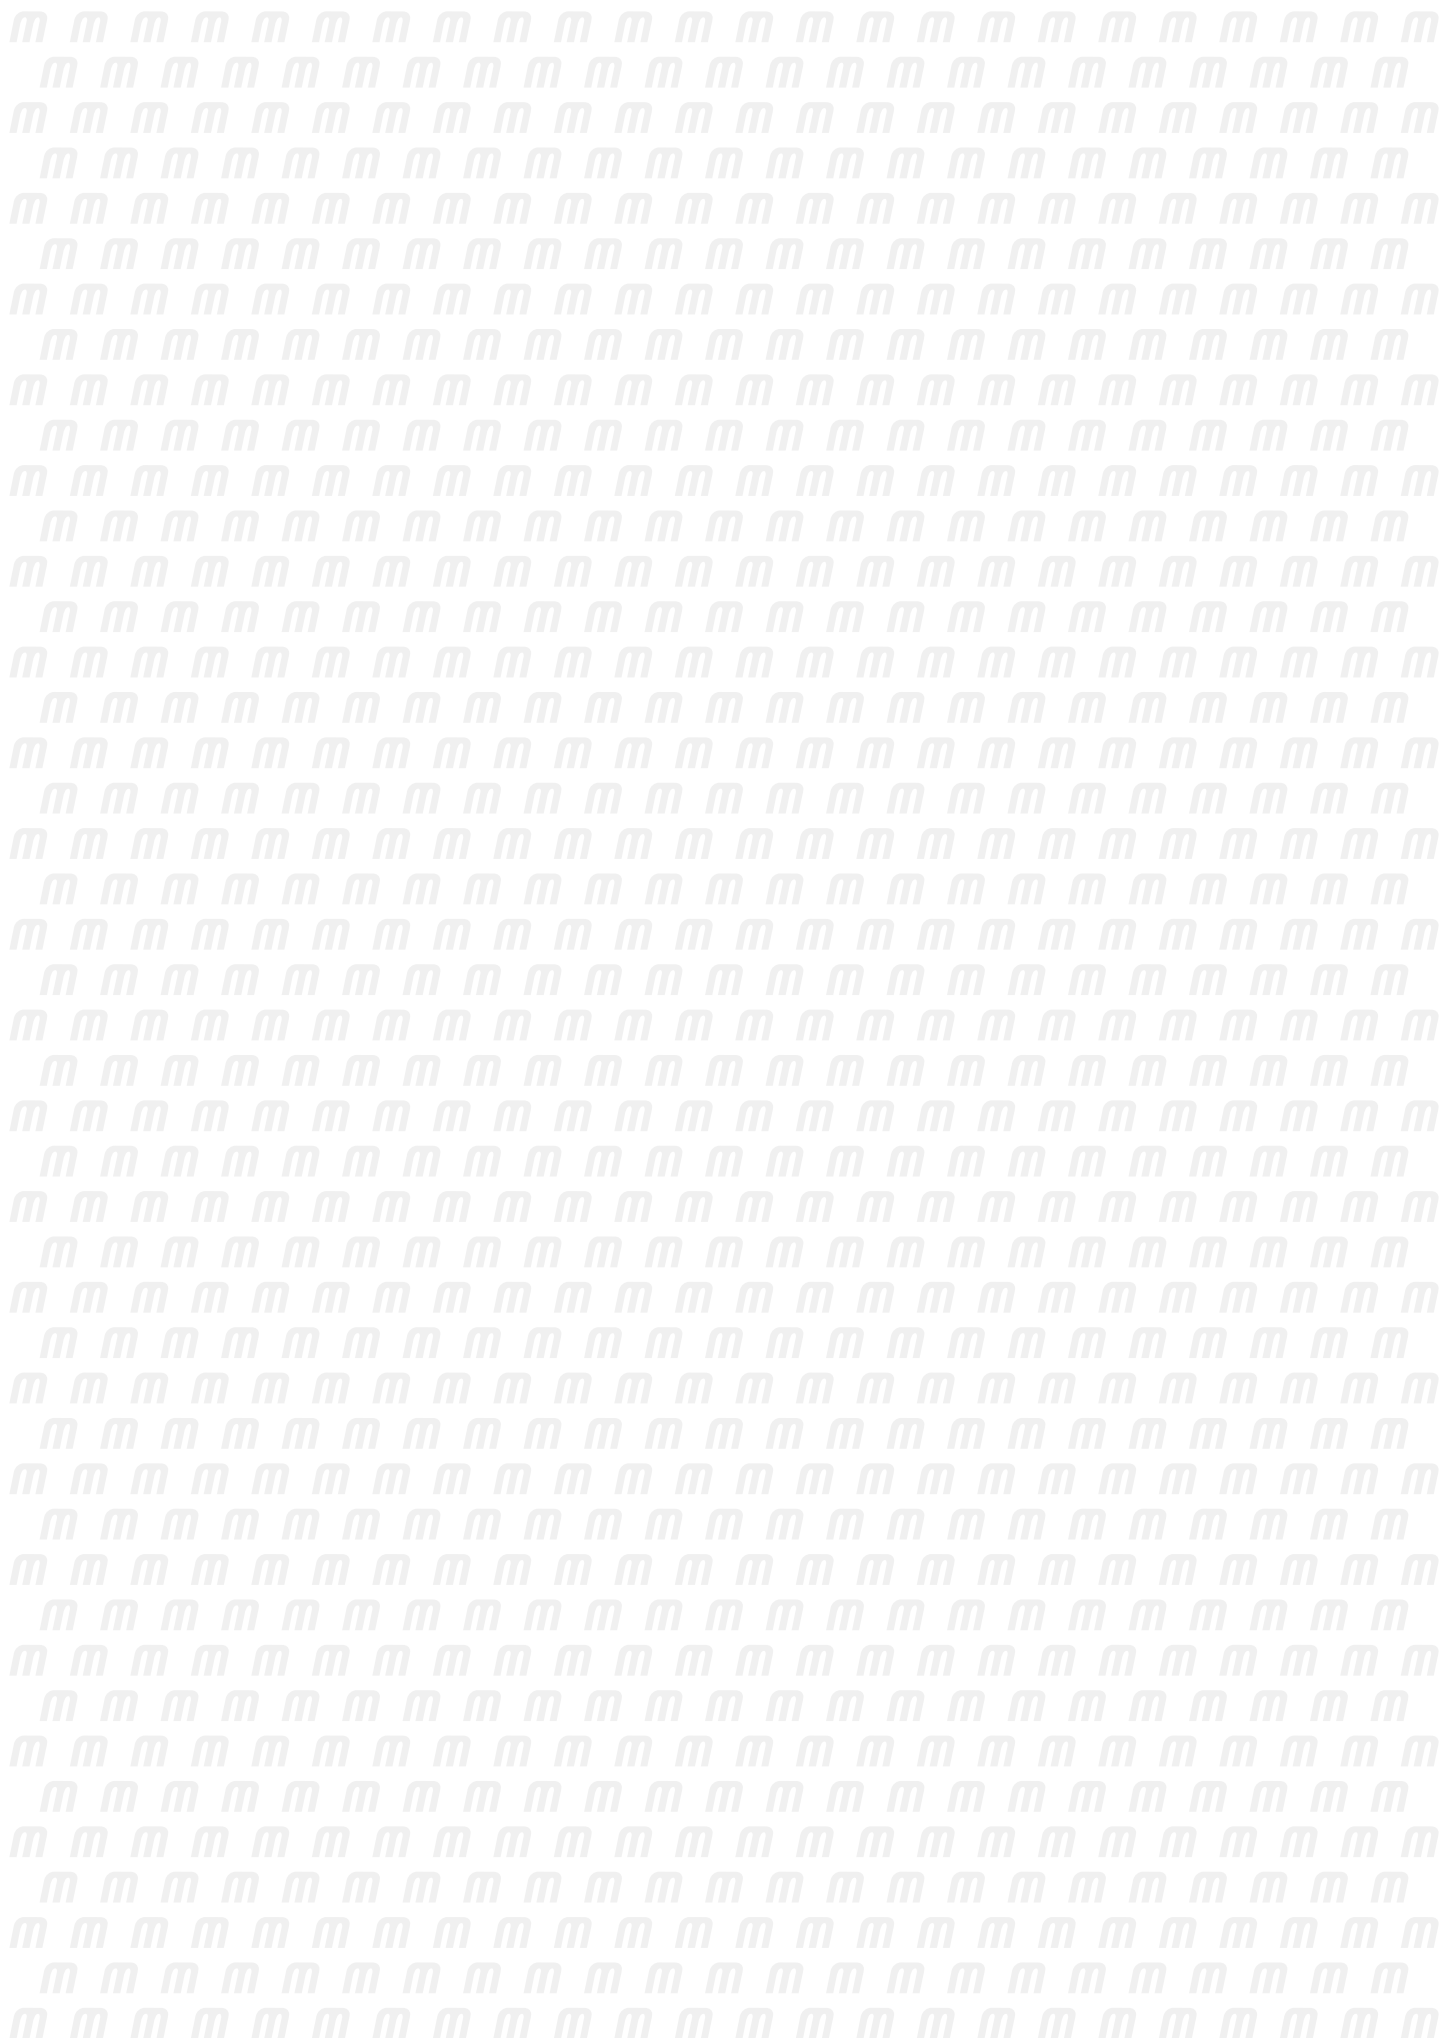## MARKETING   ## TECH SUPPORT
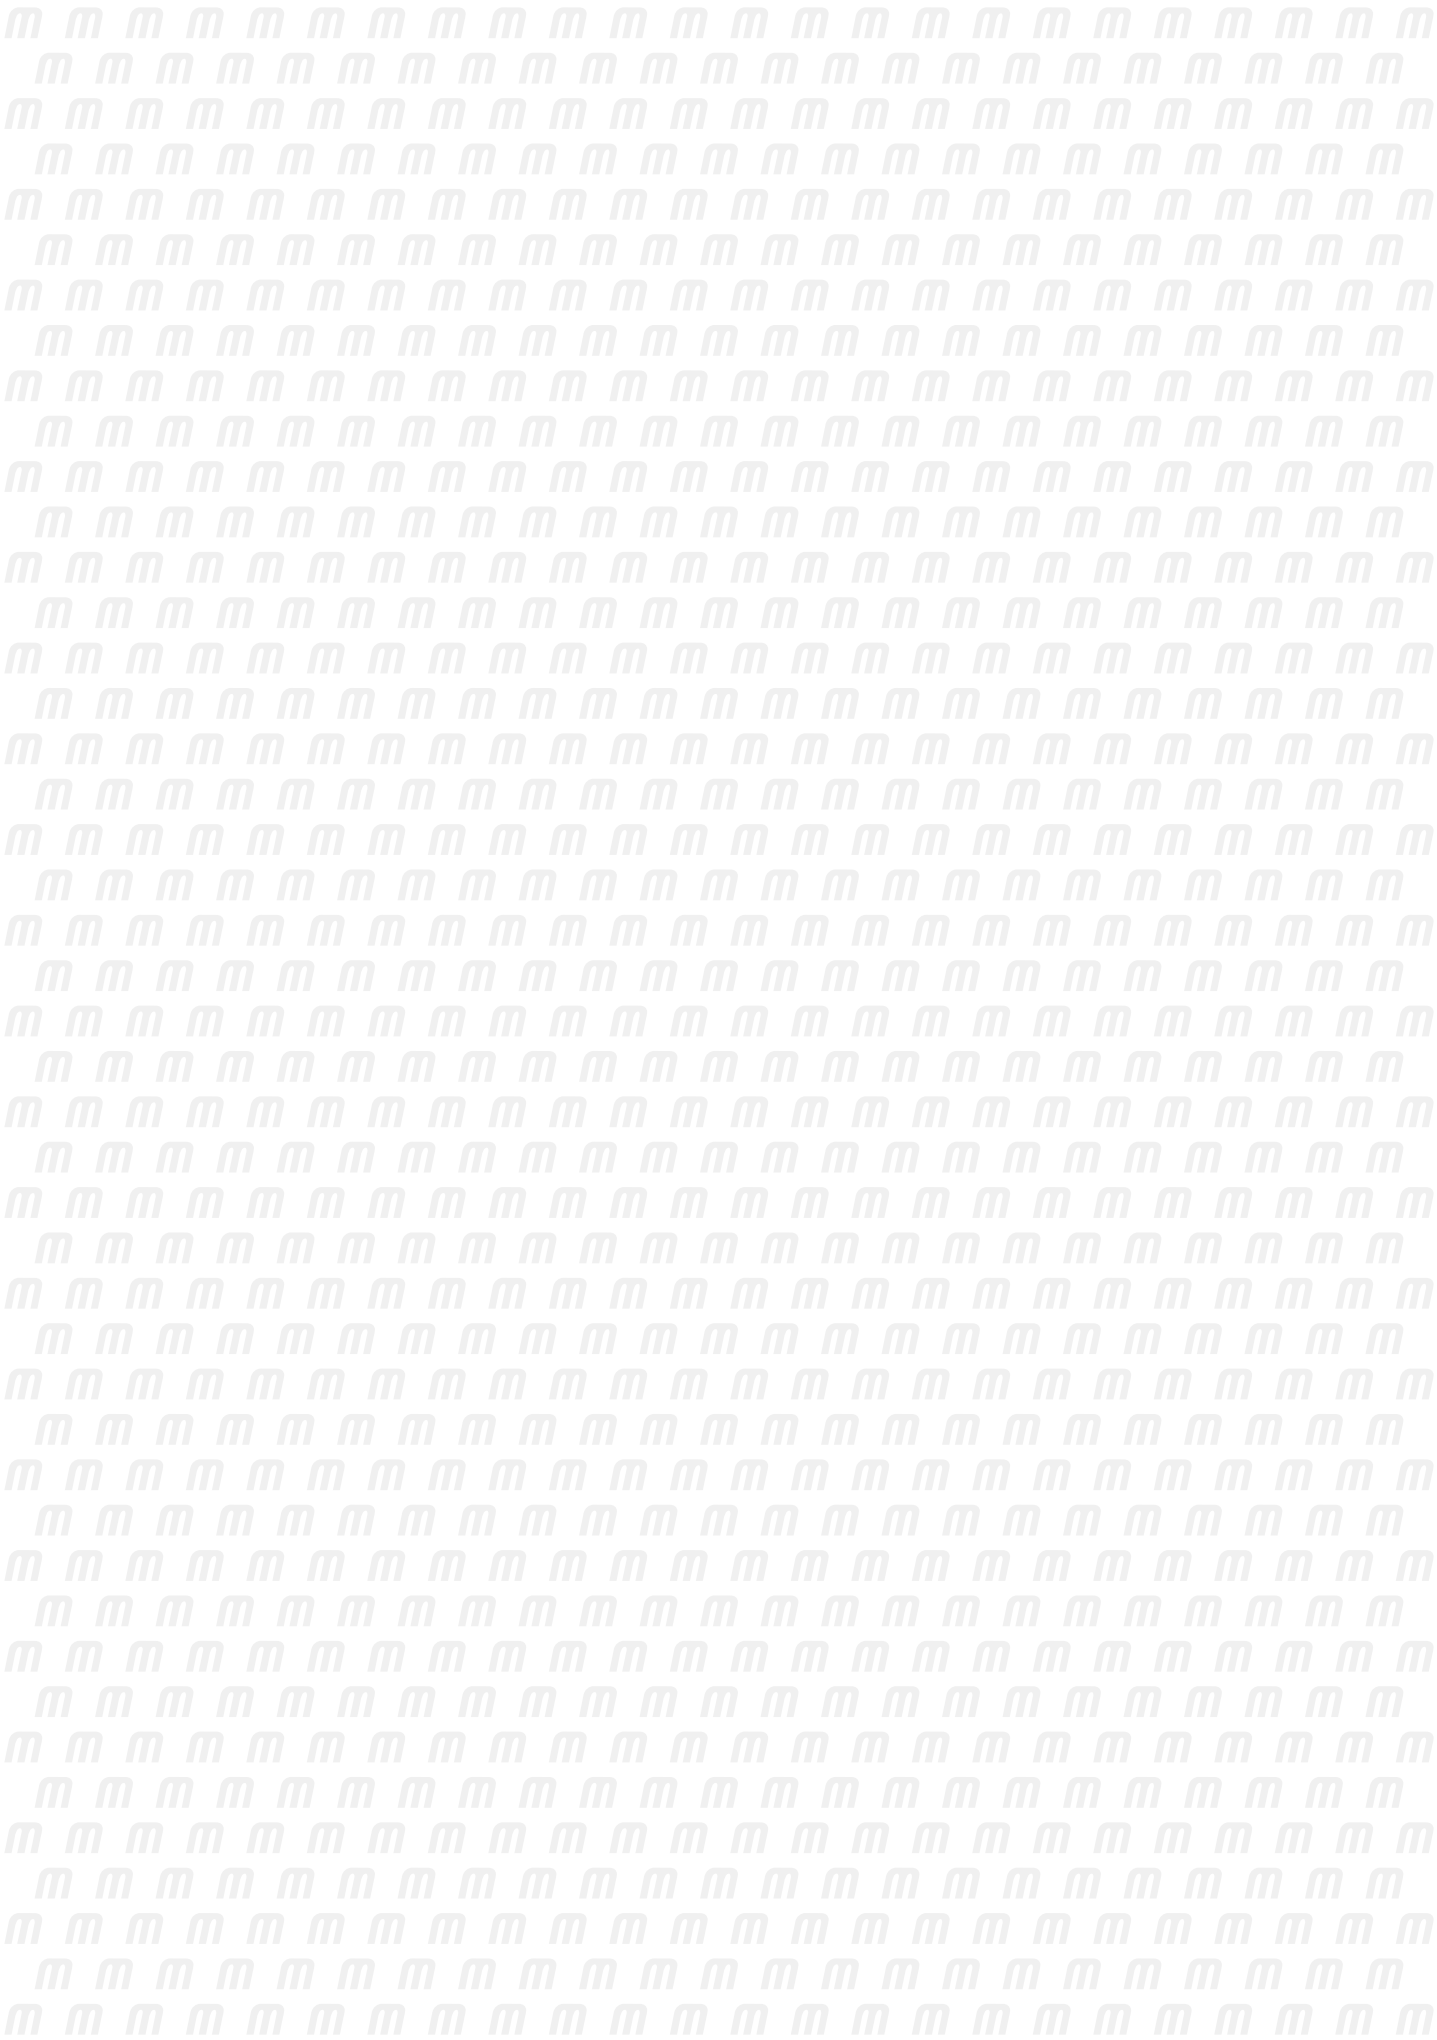

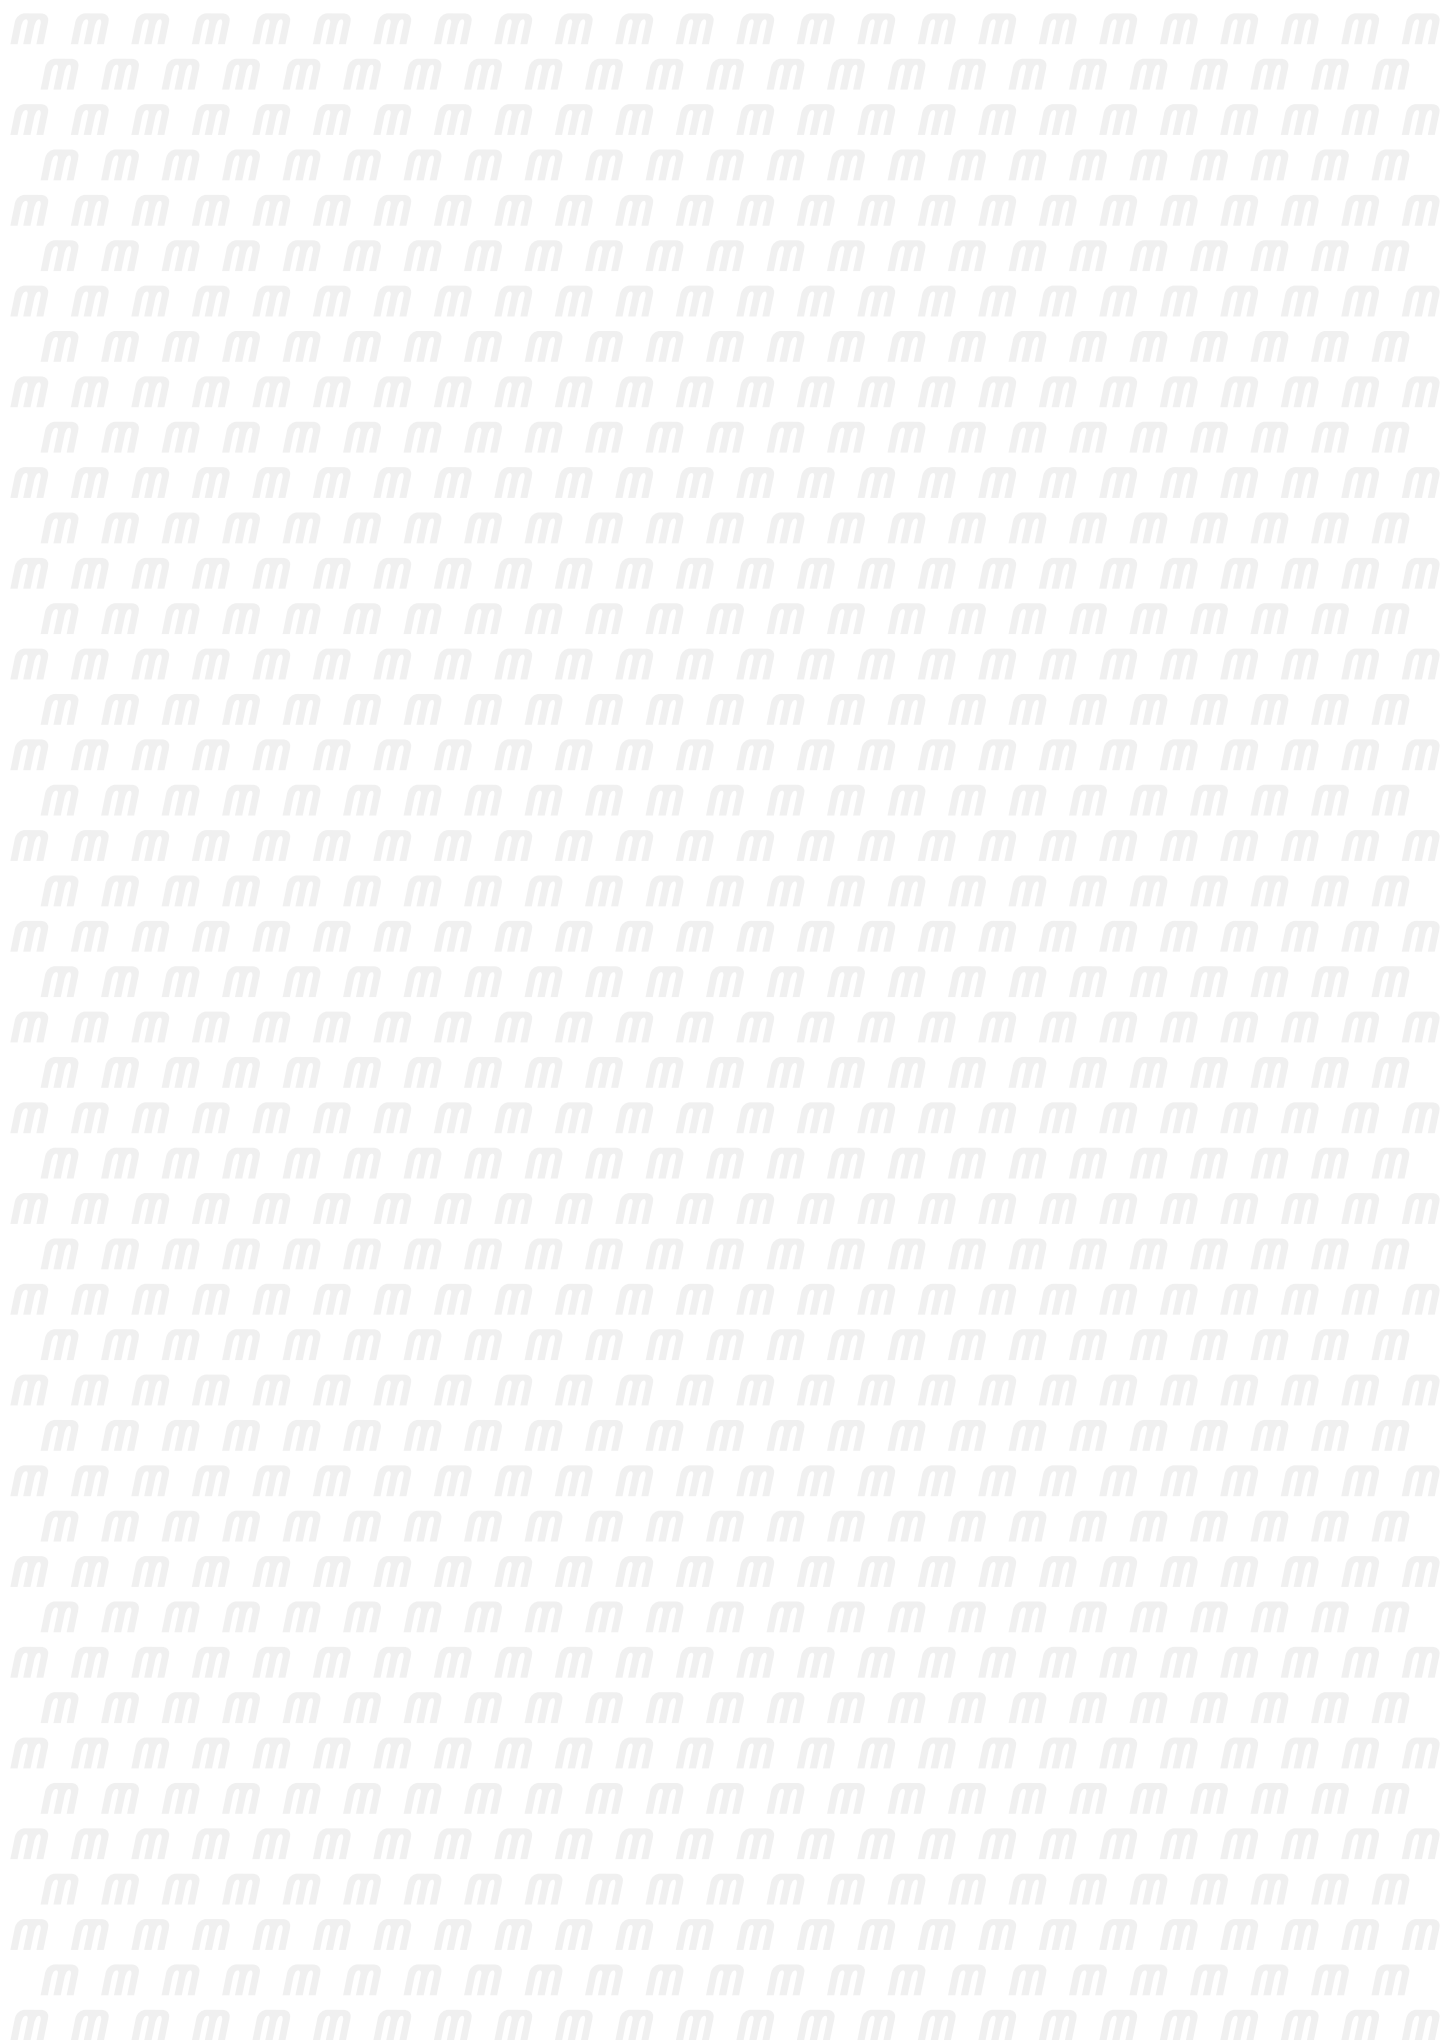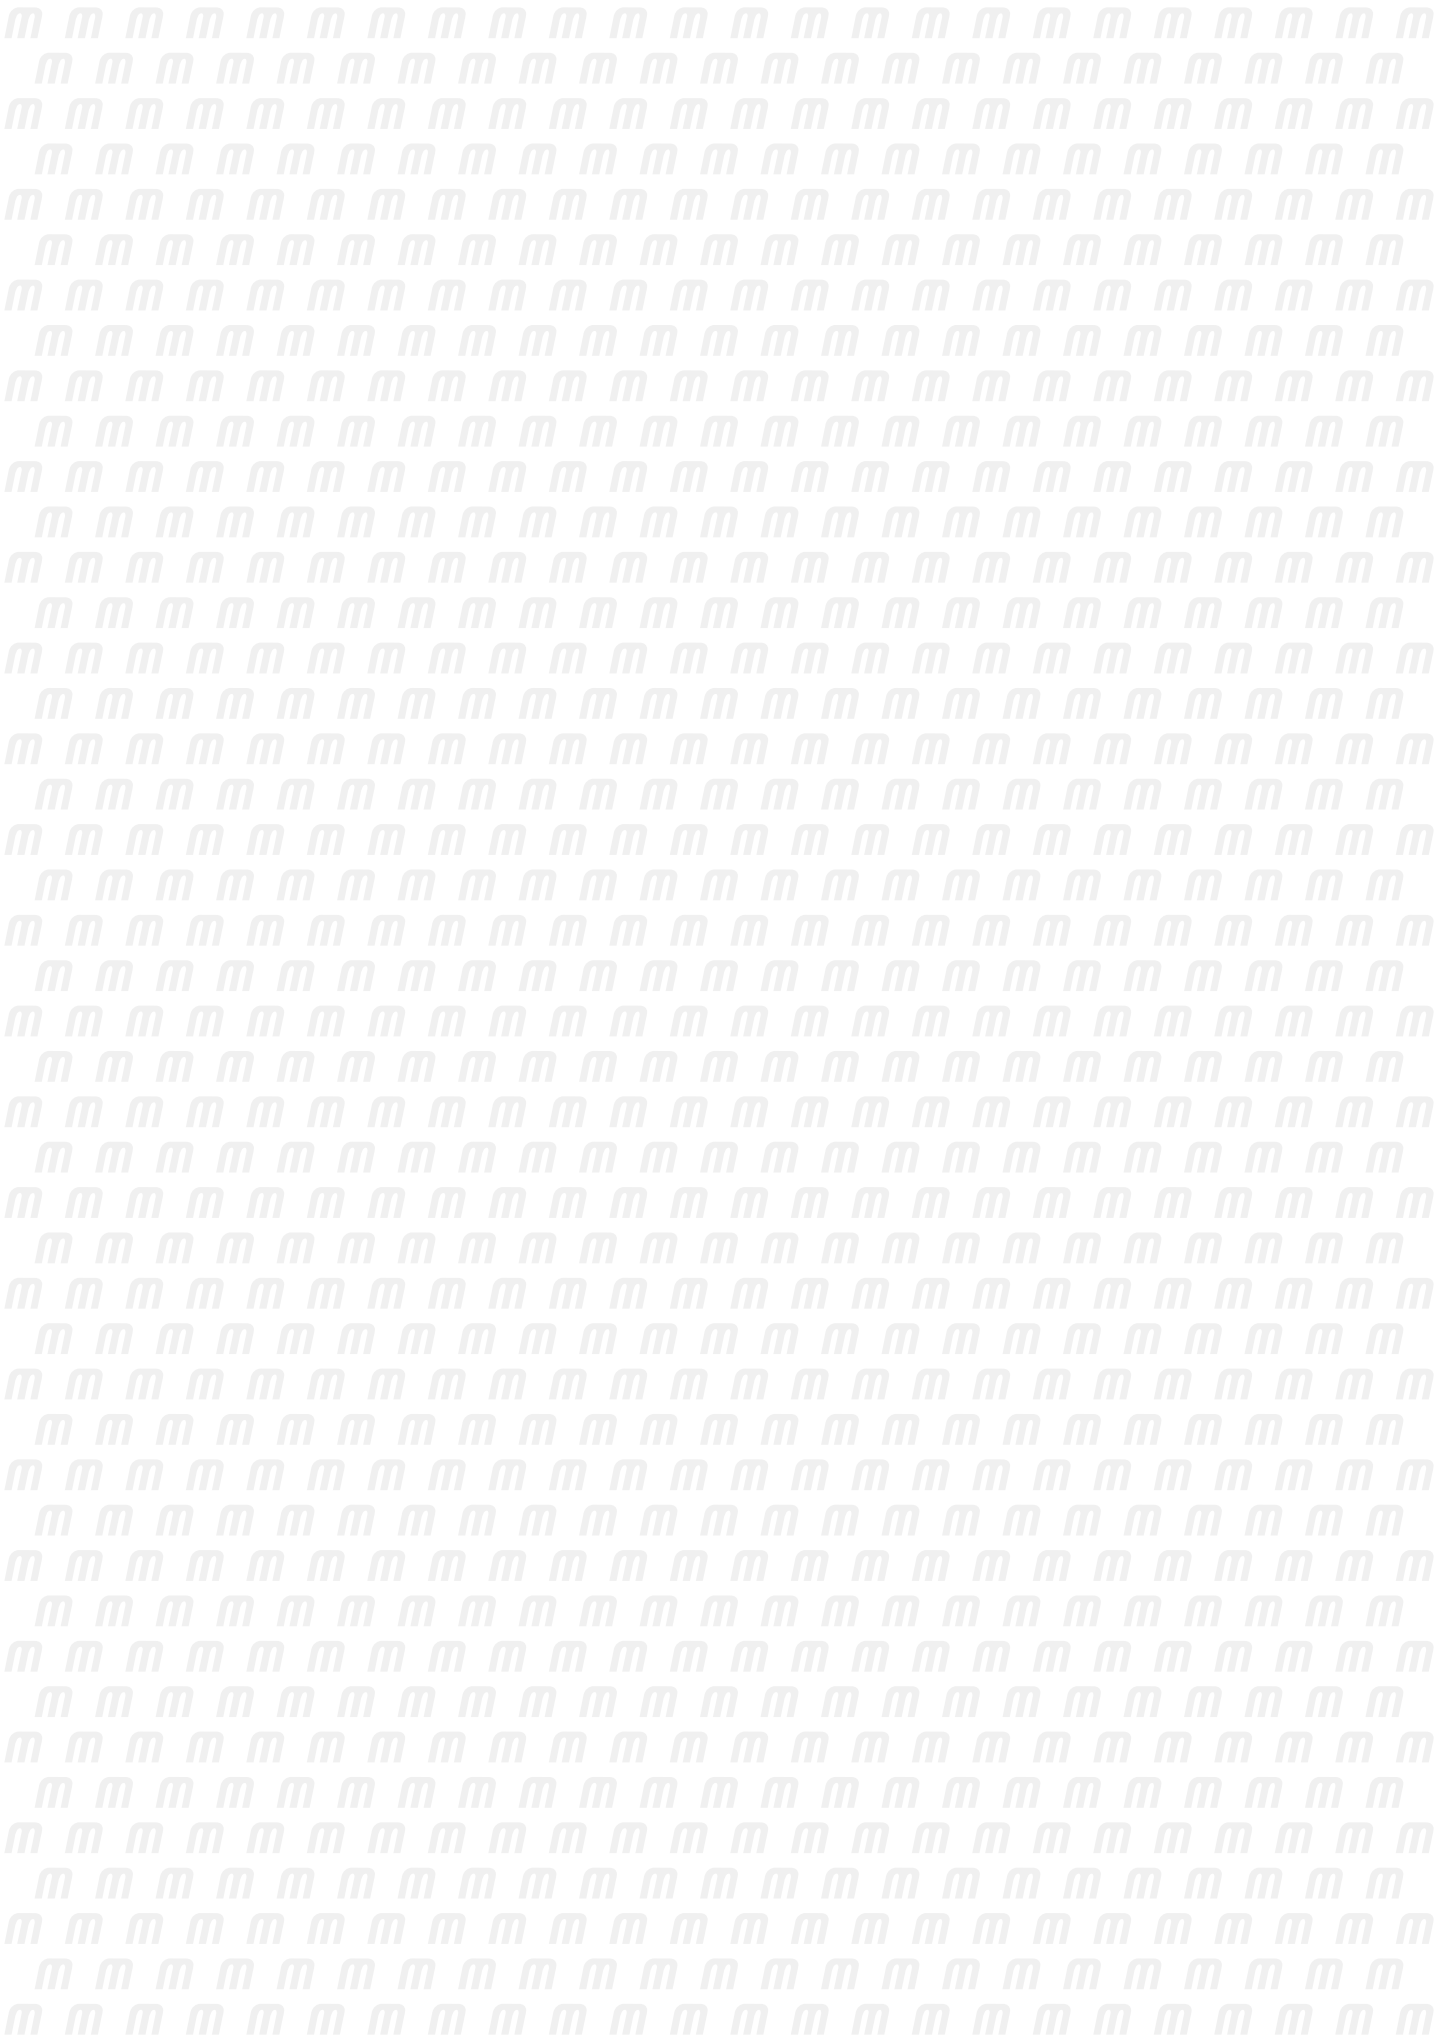HANNAH KUSSMAUL   MELEK KÜCÜKMUNCU   THOMAS KNETSCH   ANDREAS KEHLENBACH

WORLDWIDE
DISTRIBUTORS

COUNTRY	DISTRIBUTOR	WEB
ARGENTINA	Alles Import S.A.	WWW.ALLESFOTOCINEVIDEO.COM
AUSTRALIA	Alderson Camera Stores Ltd.	WWW.FOTORIESEL.AU
AUSTRIA	Sagafoto	WWW.SAGAFOTO.AT
BELGIUM	Jupiter BVBA	WWW.JUPITERFOTO.COM
CANADA	Multiblitz USA. LLC.	WWW.MULTIBLITZUSA.COM
CHINA	Shenzen Canley Digital Technology Co. Ltd.	WWW.CANLEY.COM.CN
CROATIA	Prizma d.o.o.	WWW.PRIZMA-FOTO.HR
CZECH REPUBLIC	Light Q. s.r.o.	WWW.LIGHTQ.CZ
DENMARK	Photografica Aps.	WWW.PHOTOGRAFICA.COM
ESTONIA	AS Fotex	WWW.FOTEX.EE
FINLAND	Studiovarustamo Oy	WWW.STUDIOVARUSTAMO.FI
FRANCE	McDonald-Multiblitz France S.A.R.L.	WWW.MMF-PRO.COM
GERMANY	Multiblitz Dr. Ing. D. A. Mannesmann GmbH	WWW.MULTIBLITZ.DE
GREAT BRITAIN	Mr. CAD Beginlaunch Ltd.	WWW.MRCAD.CO.UK
HONG KONG	Hopeful & Canley Co. Ltd.	WWW.HOPEFUL-CANLEY.COM
HUNGARY	Studioline Fototechnika kft	WWW.NIKA.HU
INDIA	Eastern Photographic Co.	WWW.EASTERNPHOTOGRAPHIC.COM
IRAN	Ahmad Mayel Afshar Enterprises	WWW.AMA-ENT.COM
ITALY (NORTH)	Image Consult srl	WWW.MULTIBLITZ.IT
ITALY (SOUTH)	DGTales	WWW.DGTALES.COM
LITHUANIA	UAB Fototechnika	WWW.FOTOTECHNIKA.LT
LUXEMBOURG	Lecuit Opto Technical S.A.	WWW.LECUIT.LU
MEXICO	Materia Grafica Servicios S.A de C.V	WWW.MATERIAGRAFICASERVICIOS.COM
NEW ZEALAND	Photo Warehouse	WWW.PHOTOWAREHOUSE.CO.NZ
POLAND	Multiblitz w Polsce s.c.	WWW.MULTIBLITZ.COM.PL
PORTUGAL	Ibermagem e som LDA.	WWW.IBERMAGEM.PT
ROMANIA	S.C. Imatech Trade & Imaging S.R.L.	WWW.IMATECH.RO
RUSSIA/C.I.S	Converse Ltd.	WWW.CONVERSE.RU
SAUDI ARABIA	Saleh Alnahdi & Sons Ltd.	WWW.ALNAHDIGROUP.COM
SLOVENIA	Meditrade d.o.o.	WWW.MEDITRADE.SI
SPAIN	Cimat Foto S.A.	WWW.CIMATFOTO.COM
SWEDEN	HT Foto	WWW.HTFOTO.SE
SWITZERLAND	Ott & Wyss AG	WWW.FOTOTECHNIK.CH
THE NETHERLANDS	Transcontinenta B.V.	WWW.TRANSCONTINENTA.NL
TURKEY	Ekinci Fotografcilik	WWW.EKINCIFOTOGRAF.COM.TR
U.A.E - DOHA	Salam Studio & Stores	WWW.SALAMS.COM
U.A.E - DUBAI	Salam Studio & Stores	WWW.SALAMS.COM
U.S.A.	Multiblitz USA. LLC.	WWW.MULTIBLITZUSA.COM

For more Multiblitz distributors go to WWW.MULTIBLITZ.COM

VISIT US ONLINE:
WWW.MULTIBLITZ.COM